



CONTACT US

联系我们



WeChat
微信公众号



WeChat Channel
微信视频号



Facebook
Facebook



LinkedIn
领英

地址/Address:

No.4, Huanzhen East Road, Beijiao Town, Shunde District, Foshan, Guangdong, China
广东省佛山市顺德区北滘镇环镇东路4号

邮箱/Email:


Sales@eaglerise.com

网址/Web:

Lighting.eaglerise.com(英文站)
Lighting-eaglerise.com(中文站)



Stock Code: 002922

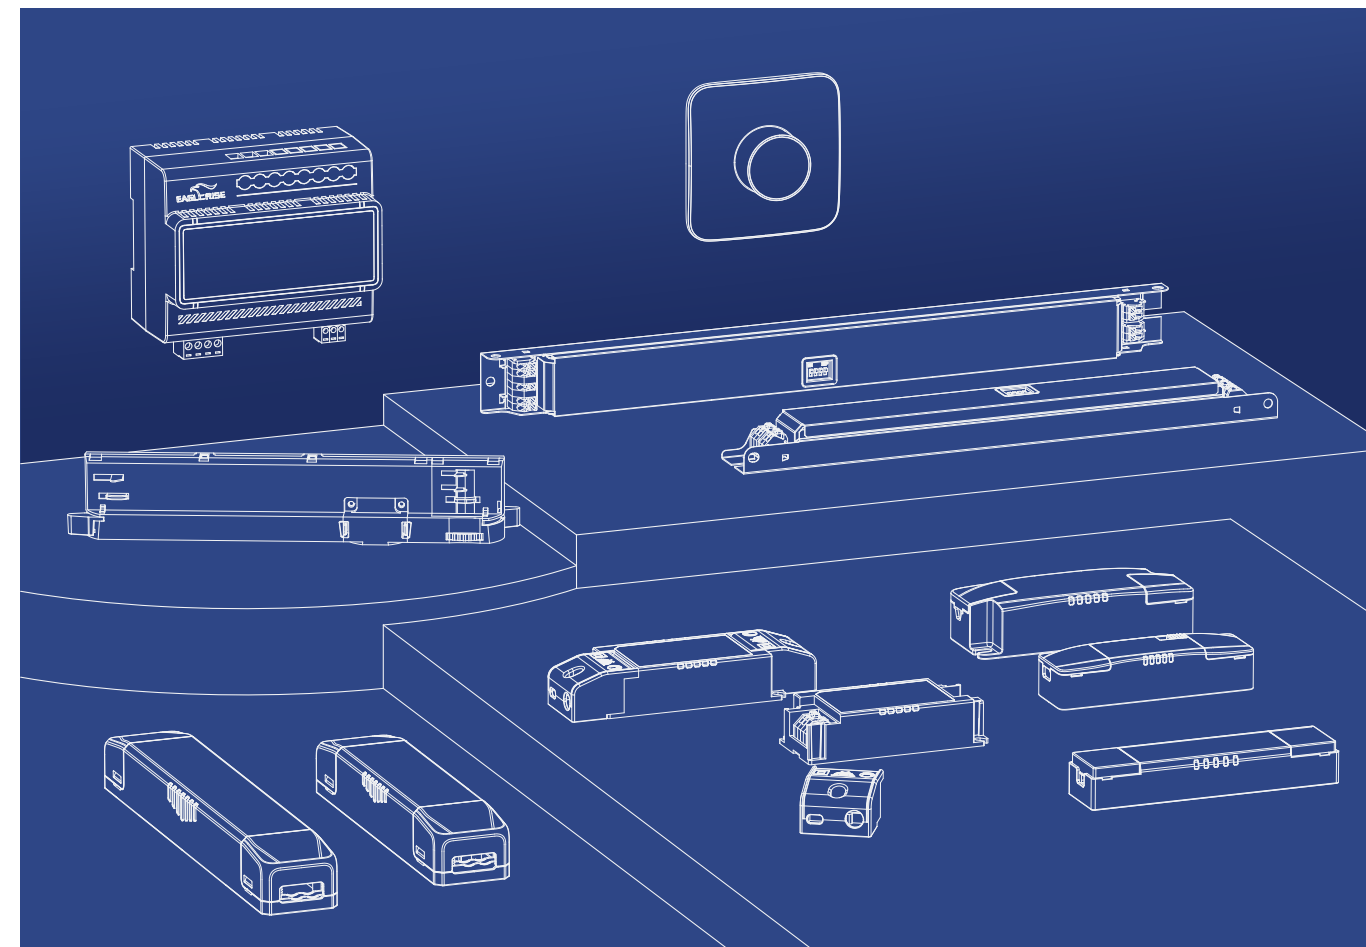


NEW PRODUCT MANUAL

2025.10

LINEAR SERIES

DALI-2 + 0-10V Dimming

- For luminaries of protection Class I or Class II
- 可适配I或II类的灯具
- Isolated / SELV / Built-in/Independent(With side caps)
- 隔离 / 安全特低电压 / 内置/独立（带侧盖）
- Protections: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Support DALI-2 / Push / 0-10V Dimming
- 支持DALI-2 / PUSH / 0-10V调光
- Adjustable Output Current with dip-switch
- 拨码调节输出电流
- Suitable for emergency lighting acc. to EN 50172
- 适用于符合EN 50172的应急照明
- DALI-2 Parts 251, 252 and 253
- 支持DALI协议part251/252/253
- 5 years warranty
- 5年质保

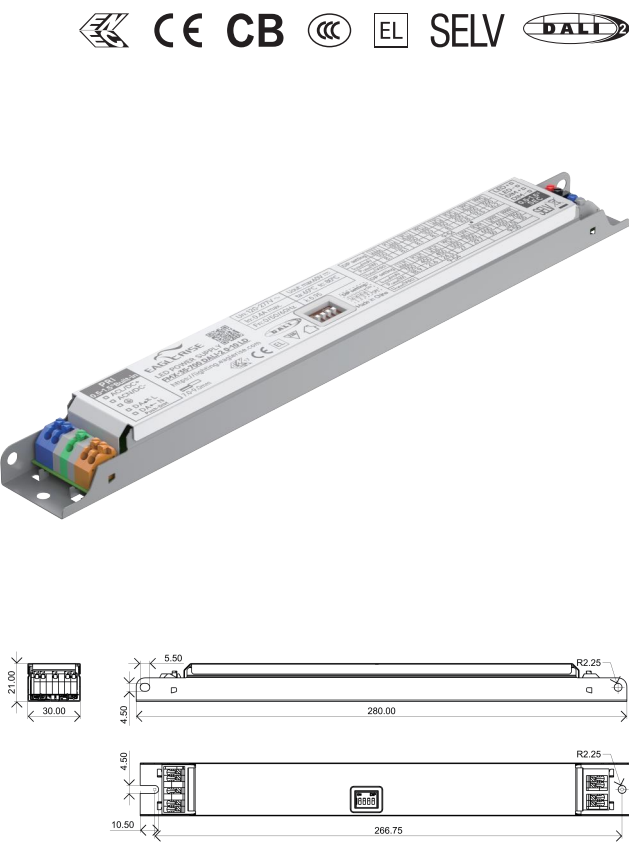


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FMX-35-700 DALI-2 0-10 LD	35W	100-305VAC	150-700mA	9-54V	90%	0.95	280*30*21mm
FMX-50-1050 DALI-2 0-10 LD	50W	100-305VAC	300-1050mA	9-54V	90%	0.95	280*30*21mm
FMX-85-2100 DALI-2 0-10 LD	85W	100-305VAC	700-2100mA	9-54V	90%	0.95	360*30*21mm

COMPACT SERIES

DALI-2 Dimming (High eff.)

- For luminaries of protection Class II
- 可适配II类的灯具
- Isolated / SELV / Built-in/Independent (With side caps)
- 隔离 / 安全特低电压 / 内置/独立（带侧盖）
- Protections: SCP / OLP / OVP/OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Support DALI-2 / Push Dimming
- 支持DALI-2 / PUSH调光
- Efficiency>93%
- 效率>93%
- Suitable for emergency lighting acc. to EN 50172
- 支持用于符合EN 50172的应急照明
- Height: 22mm
- 高度：22mm
- DALI-2 Parts 251, 252 and 253
- 支持DALI协议part251/252/253
- 5 years warranty
- 5年质保

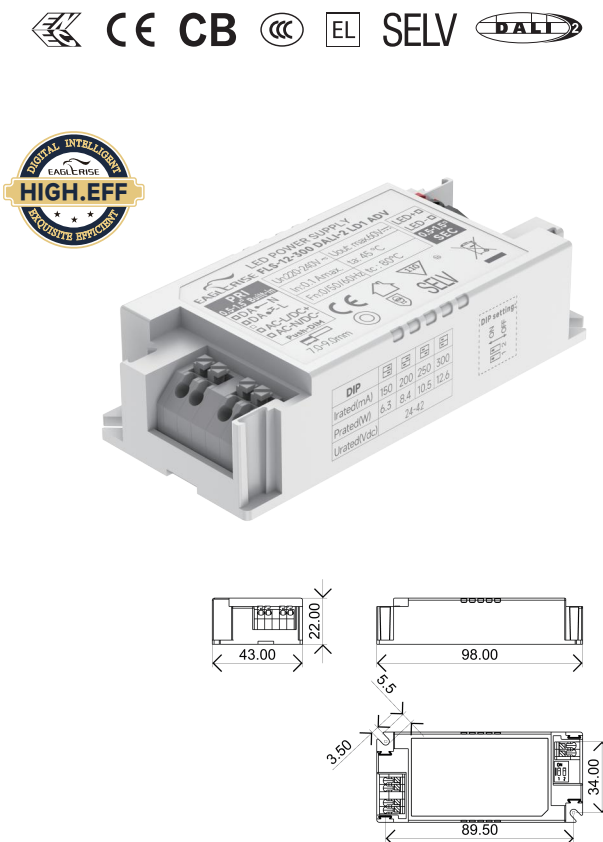


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FLS-12-300 DALI-2 LD1 ADV	12W	220-240VAC	150-300mA	24-42V	91%	0.95	98*43*22mm
FLS-30-700 DALI-2 LD1 ADV	30W	220-240VAC	350-700mA	24-42V	93%	0.95	98*43*22mm
FLS-42-1050 DALI-2 LD1 ADV	42W	220-240VAC	700-1050mA	24-42V	93%	0.95	98*43*22mm

COMPACT SERIES

DALI-2 & 0-10V & Triac & Wireless Dimming

- For luminaries of protection Class II
- 可适配II类灯具
- Isolated / SELV / Independent
- 隔离 / 安全特低电压 / 独立式
- Support DALI-2 / 0-10V / Bluetooth / Triac Dimming
- 支持DALI / 0-10V / 蓝牙 / 可控硅调光
- Passes through 35mm holes
- 可过35mm孔径
- Protections: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- 5 years warranty
- 5年质保

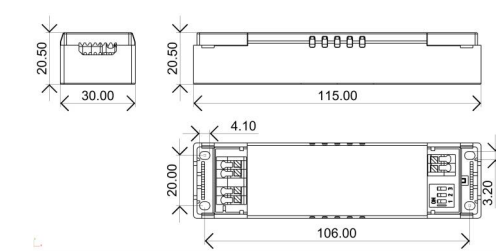

Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FLS-8-500 DALI-2 LA ADV	8W	220-240VAC	150-500mA	2.5-49V	84%	0.95	115*30*20.5mm
FLS-12-700 DALI-2 LA ADV	12W	220-240VAC	500-700mA	3-48V	84%	0.95	115*30*20.5mm



FLS-8-220 0-10 LA ADV	8W	220-240VAC	120-220mA	15-42V	83%	0.95	115*30*20.5mm
FLS-12-330 0-10 LA ADV	12W	220-240VAC	250-330mA	15-42V	84%	0.95	115*30*20.5mm
LS-8-XXX Blue SI-MJ	8W	220-240VAC	100-235mA	30-40V	80%	0.5	115*30*20.5mm
LS-12-XXX Blue SI-MJ	12W	220-240VAC	250-350mA	30-40V	85%	0.5	115*30*20.5mm

LS-8-XXX TRIAC LI EXC	8W	220-240VAC	120-220mA	27-40V	80%	0.95	115*30*20.5mm
LS-12-XXX TRIAC LI EXC	12W	220-240VAC	250-350mA	27-40V	80%	0.95	115*30*20.5mm

COMPACT SERIES

ON/OFF(High eff.)

- For luminaire of protection class II
- 可适配II类灯具
- Isolated / SELV / Independent
- 隔离 / 安全特低电压 / 独立式
- Protection: SCP / OLP / OVP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Efficiency>94%
- 效率>94%
- Power Factor: 0.95
- 功率因数：0.95
- Adjustable Output Current with dip-switch
- 拨码调节输出电流
- 5 years warranty
- 5年质保

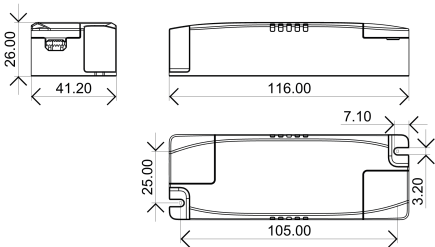
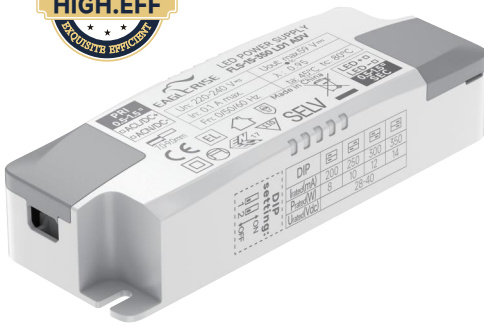


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FLS-15-350 LD1 ADV	15W	220-240V	200-350mA	28-40V	92%	0.95	116*41.2*26mm
FLS-21-500 LD1 ADV	21W	220-240V	350-500mA	28-40V	93%	0.95	116*41.2*26mm
FLS-30-750 LD1 ADV	30W	220-240V	600-750mA	28-40V	94%	0.95	116*41.2*26mm
FLS-40-1050 LD1 ADV	40W	220-240V	700-1050mA	28-40V	94%	0.95	116*41.2*26mm

COMPACT SERIES

ON/OFF(High eff.)

- For luminaire of protection class I or class II
- 可适配I或II类的灯具
- Isolated / Isolated / SELV / Built in / Independent (With side caps)
- 隔离 / 安全特低电压 / 内置 / 独立 (带侧盖)
- Input Voltage 220-240 VAC
- 输入电压: 220-240 VAC
- Protection: SCP / OLP / OVP / OTP
- 多重保护: 短路保护 / 过载保护 / 过压保护 / 过温保护
- Output current adjusted via dip-switch
- 拨码调节输出电流
- Efficiency>94%
- 效率>94%
- Suitable for emergency lighting acc. to EN 50172
- 适用于符合EN 50172的应急照明
- Height: 22mm
- 高度: 22mm
- 5 years warranty
- 5年质保



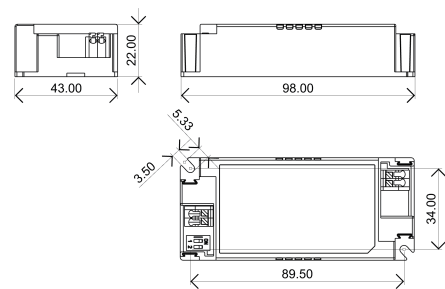
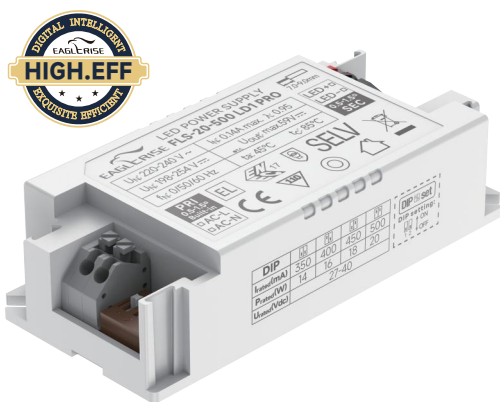


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FLS-20-500 LD1 PRO	20W	220-240V	350-500mA	27-40V	93%	0.95	98*43*22mm
FLS-30-700 LD1 PRO	30W	220-240V	550-700mA	27-40V	94%	0.95	98*43*22mm
FLS-38-900 LD1 PRO	38W	220-240V	750-900mA	27-40V	94%	0.95	98*43*22mm
FLS-42-1050 LD1 PRO	42W	220-240V	900-1050mA	27-40V	94%	0.95	98*43*22mm

COMPACT SERIES

ON/OFF(Hot sale)

- For luminaire of protection class II
- 可适配II类的灯具
- Isolated / SELV / Independent
- 隔离 / 安全特低电压 / 独立式
- Protection: SCP / OLP / OVP
- 多重保护: 短路保护 / 过载保护 / 过压保护 / 过温保护
- Flexible CCT setting via 3-way dip switch
- 色温可调
- 5 years warranty
- 5年质保

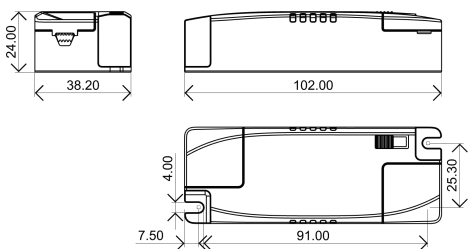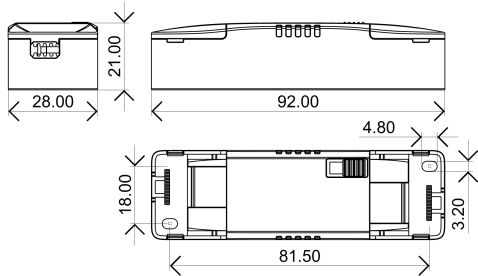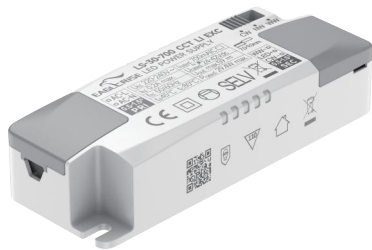
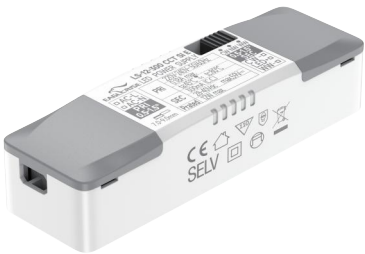


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
LS-8-XXX CCT SI E	8W	220-240VAC	70-700mA	30-40V	80%	0.6	92*28*21mm
LS-12-XXX CCT SI E	12W	220-240VAC	250-700mA	30-40V	82%	0.6	92*28*21mm
LS-21-XXX CCT SI E	21W	220-240VAC	300-700mA	30-42V	85%	0.6	92*36*25mm
LS-30-XXX CCT LI EXC	30W	220-240VAC	600-800mA	24-42V	87%	0.95	102*38.2*24mm

TRACK SERIES

DALI-2 DT8 Dimming

- For luminaire of protection class II
- 可适配II类灯具
- Isolated / SELV
- 隔离 / 安全特低电压
- Protection: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Tunable White DT8, Push Dimming, Corridor mode
- 支持DT8调光，PUSH调光，支持走廊模式
- DALI-2 Parts 251, 252 and 253
- 支持DALI协议part251/252/253
- Dimming range 1% to 100%
- 1% to 100%调光范围
- Output current adjusted via dip-switch; 14 current steps
- 拨码调节输出电流；共有14拨码档位
- 6 Wires 3 Circuit DALI Track System
- 6线3路DALI导轨系统
- Adaptation to mainstream brands of rails
- 适配主流品牌轨道
- Available in black, white and grey
- 黑、白、灰三色可选
- 5 years warranty
- 5年质保

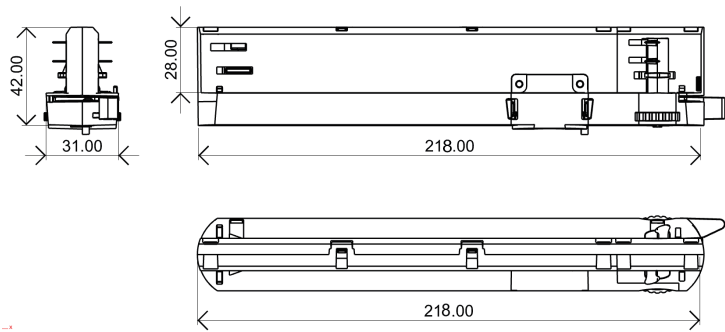
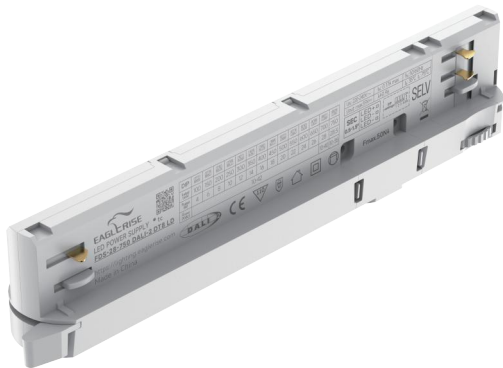


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FDS-28-750 DALI-2 DT8 LD	28W	220-240V	100-750mA	10-42V	86%	0.95	218*31*42mm

TRACK SERIES

CASAMBI Dimming

- For luminaire of protection class II
- 可适配II类灯具
- Isolated / SELV
- 隔离 / 安全特低电压
- Protection: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Dimming via CASAMBI
- 支持CASAMBI调光
- Dimming range 1% to 100%
- 1% to 100%调光范围
- Output current adjusted via NFC
- NFC调节输出电流
- 4 Wires 3 Circuit Track System
- 4线3路导轨系统
- Adaptation to mainstream brands of rails
- 适配主流品牌轨道
- Available in black, white and grey
- 黑、白、灰三色可选
- 5 years warranty
- 5年质保

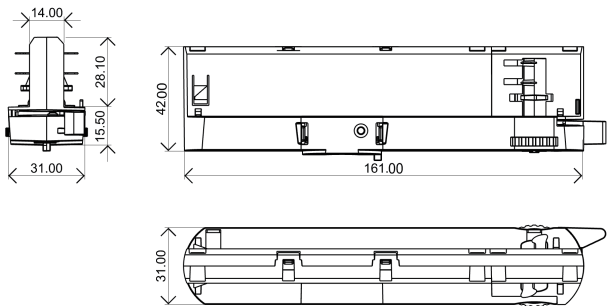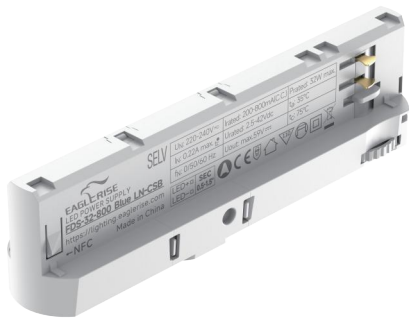


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FDS-32-800 Blue LN-CSB	32W	220-240V	200-800mA	2.5-49V	89%	0.95	161*31*42mm

CV SERIES

0-10V Dimming

- For luminaire of protection class II
- 可适配II类灯具
- SELV / Independent
- 安全特低电压 / 独立式
- Protections: SCP / OLP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Support 0-10V / RX / PWM Dimming
- 支持0-10V / RX / PWM调光
- 5 years warranty
- 5年质保

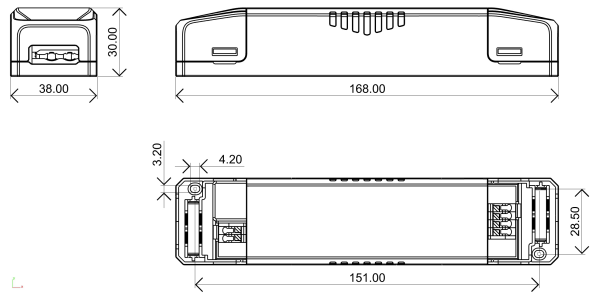


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
LS-45-24 0-10 LI	45W	220-240V	0-1.88A	24V	87%	0.95	168*38*30mm
LS-80-24 0-10 LI	80W	220-240V	0-3.33A	24V	89%	0.95	227*38*30mm
LS-150-24 0-10 LI	150W	220-240V	0-6.25A	24V	92%	0.95	318*38*30mm
*LS-250-24 0-10 LI	250W	220-240V	0-10.41A	24V	91%	0.95	431*45*30.5mm

*即将上市
Coming soon

CV SERIES

ON/OFF

- For luminaries of protection Class I
- 可适配I类灯具
- Isolated / SELV / built-in
- 隔离 / 安全特低电压 / 内置式
- Protections: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Power Factor≥0.95
- 功率因素≥0.95
- Efficiency>92%
- 效率>92%
- 5 years warranty
- 5年质保

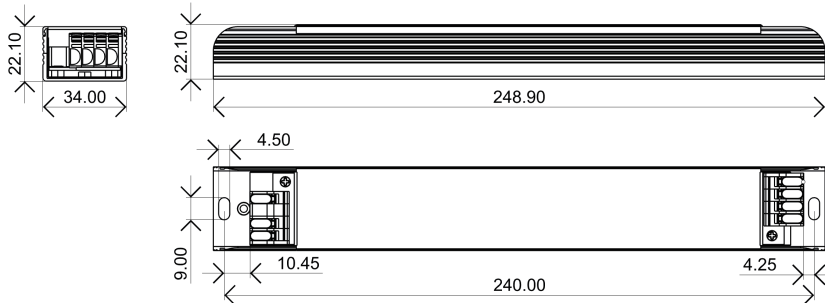


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
MS-120-48 LX-YX	120W	220-240V	0-2.5A	48V	92%	0.95	249*34*22.1mm
MS-150-24 LX-YX	150W	220-240V	0-6.25A	24V	92%	0.95	249*34*22.1mm
MS-150-48 LX-YX	150W	220-240V	0-3.13A	48V	92%	0.95	249*34*22.1mm
MS-200-48 LX-YX	200W	220-240V	0-4.17A	48V	92%	0.95	306*34*22.1mm

NA SERIES

0-10V +TRIAC

- For luminaire of protection class II
- 可适配II类灯具
- Isolated / SELV / built-in
- 隔离 / 安全特低电压 / 内置式
- Protections: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Input Voltage : 120-277VAC
- 输入电压：120-277VAC
- Power Factor > 0.9
- 功率因素>0.9
- Support 0-10V / TRIAC dimming
- 支持0-10V / TRIAC调光
- Efficiency≥85%
- 效率≥85%
- Flicker-free
- 无频闪
- 5 years warranty
- 五年质保

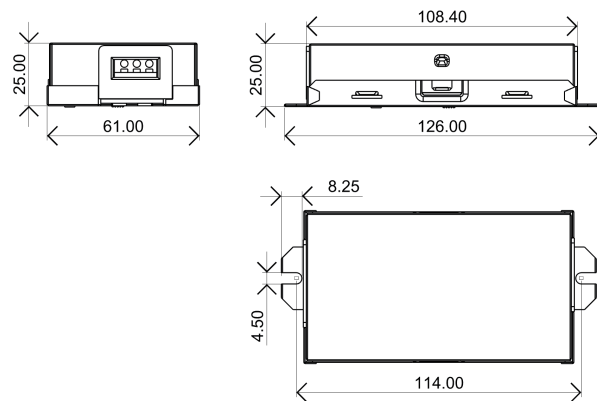


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FMW-30-750 0-10 TRIAC LB-S	30W	120-277VAC	350-750mA	27-42V	85%	0.9	126*61*25mm
FMW-50-1250 0-10 TRIAC LB-S	50W	120-277VAC	750-1250mA	27-42V	85%	0.9	126*61*25mm

NA SERIES

0-10V

- For luminaire of protection class II
- 可适配II类灯具
- Isolated / SELV / built-in
- 隔离 / 安全特低电压 / 内置式
- Protections: SCP/OLP/OVP/OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Input Voltage: 120-277VAC
- 输入电压：120-277VAC
- Power Factor > 0.9
- 功率因素>0.9
- Support 0-10V dimming
- 支持0-10V调光
- Efficiency≥86%
- 效率≥86%
- Flicker-free
- 无频闪
- 5 years warranty
- 五年质保

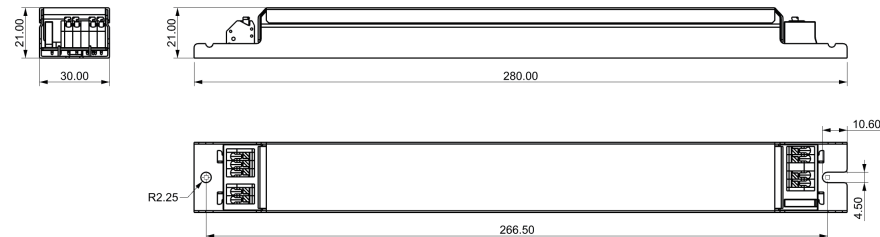


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FMW-30-750 0-10 LN	30W	120-277VAC	350-750mA	27-42V	86%	0.9	280*30*21mm
FMW-50-1250 0-10 LN	50W	120-277VAC	750-1250mA	27-42V	86%	0.9	280*30*21mm

NA SERIES

0-10V

- For luminaire of protection class II
- 可适配II类灯具
- Isolated / SELV / built-in
- 隔离 / 安全特低电压 / 内置式
- Protections: SCP / OLP / OVP / OTP
- 多重保护：短路保护 / 过载保护 / 过压保护 / 过温保护
- Input Voltage: 120-277VAC
- 输入电压：120-277VAC
- Power Factor > 0.9
- 功率因素>0.9
- Support 0-10V dimming
- 支持0-10V调光
- Efficiency≥85%
- 效率≥85%
- Flicker-free
- 无频闪
- 5 years warranty
- 五年质保


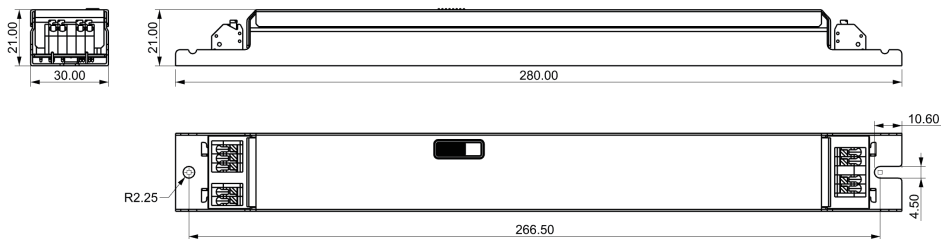


Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FMW-30-750 0-10 LD	30W	120-277VAC	350-750mA	27-42V	85%	0.9	280*30*21mm
FMW-50-1250 0-10 LD	50W	120-277VAC	750-1250mA	27-42V	85%	0.9	280*30*21mm

NA SERIES

0-10V CCT

- For luminaries of protection Class I
- 可适配I类灯具
- SELV / Built-in
- 安全特低电压 / 内置式
- Protections: SCP / OLP / OVP
- 多重保护：短路保护 / 过载保护 / 过压保护
- Support 0-10V Dimming
- 支持0-10V调光
- Flexible CCT setting
- 色温可调
- 5 years warranty
- 5年质保

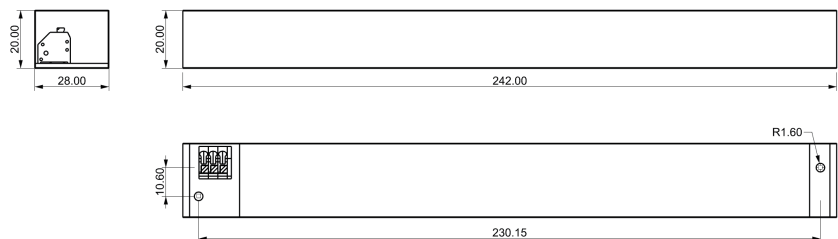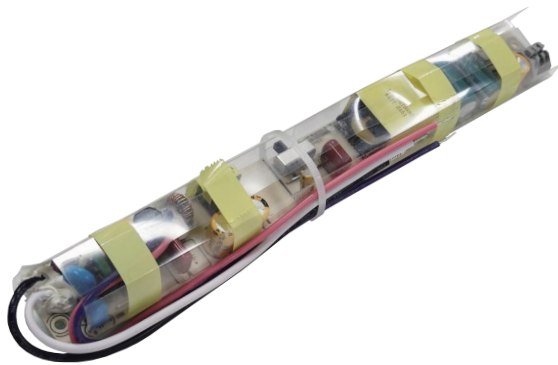

Model 型号	Power 功率	Input Voltage 输入电压	Output Current 输出电流	Output Voltage 输出电压	Efficiency 效率	Power Factor 功率因数	Size (L*W*H) 尺寸
FNZ-40-1000 0-10 CCT-3 RD	40W	120-347VAC	550-1000mA	30-40V	87%	0.9	242*28*20mm
FNZ-50-1000 0-10 CCT-3 RD	50W	120-347VAC	650-1000mA	40-50V	88%	0.9	242*28*20mm
FNW-40-1000 0-10 CCT-3 LD	40W	120-277VAC	550-1000mA	30-40V	86%	0.9	242*28*20mm
FNW-50-1000 0-10 CCT-3 LD	50W	120-277VAC	650-1000mA	40-50V	87%	0.9	242*28*20mm


DALI Gateway

DALI 网关

- **Input Voltage: 22-26 VDC; Max 500mA**
· 输入电压：22-26 VDC; Max 500mA
- **35mm DIN rail mounting for electrical distribution boxes (6P)**
· 35mm电箱导轨安装（6P）
- **Integrated with 2-channel DALI bus power supply**
· 集成2路DALI总线电源
- **Supports cross-bus power device interlinking**
· 支持跨总线电源设备联动
- **Enables offline debugging and control via mobile app**
· 支持手机APP离线调试和控制
- **Compatible with RS485 system integration**
· 支持接入RS485系统
- **Compatible with CAN bus system integration**
· 支持接CAN总线系统



ER-GW-DALI-2 02-A

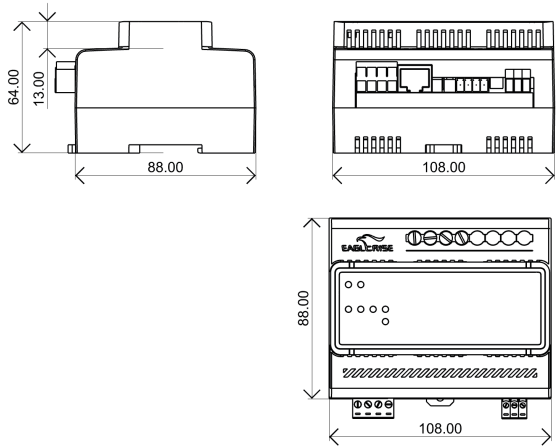


DALI Dimmer

DALI 调光器

- **Adopts the DALI standard protocol IEC 62386**
· 采用DALI标准协议IEC62386
- **Integrates built-in bus power supply**
· 集成总线电源
- **Supports brightness and color temperature memory**
· 可记忆亮度和色温
- **Adjustable minimum brightness and color temperature range**
· 最低亮度、色温范围可调
- **DALI broadcast mode available, requiring no commissioning**
· DALI广播模式，无需调试



ER-T-DALI-2 DT8 JQ-01 A

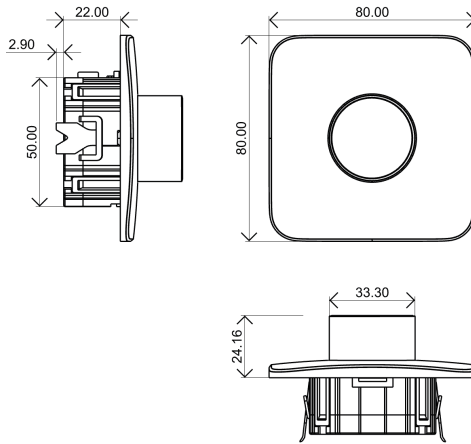

ACCESSORIES

ACCESSORIES


DALI Panel

DALI 开关面板

- Compatible with all DALI-2 certified application controllers
 - 兼容所有 DALI-2 认证的应用控制器
- Supports "IEC 62386-332 feedback" function
 - 支持"IEC 62386-332 反馈"功能
- Powered via DALI-2 bus
 - 通过DALI-2总线供电
- Available in 3 colors: white, gray, and gold
 - 白、灰、金等3种颜色可选
- Support control of 6 scenarios
 - 支持6个DALI场景控制



ER-SP-DALI-2 06-A

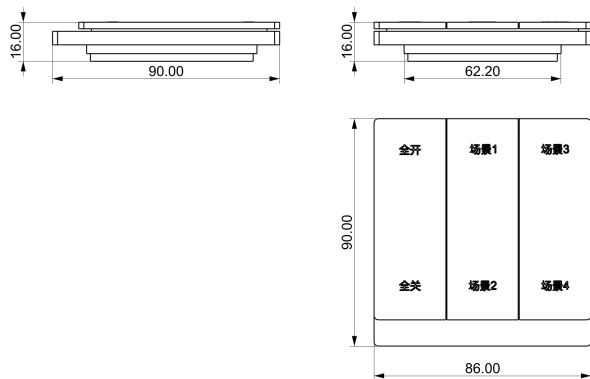

DALI Sensor

DALI 多功能传感器

- Illuminance sensing supports 0~1024 lux
 - 照度感应支持0~1024lux
- Temperature sensing supports -40~51°C
 - 温度感应支持-40~51°C
- Humidity sensing supports 0~100% RH
 - 湿度感应支持0~100%RH
- Powered via DALI-2 bus
 - 通过DALI-2总线供电
- Compact size, suitable for installation in tight spaces
 - 体积小巧，适合紧凑空间安装



ER-BS-DALI-2 01-A

