

150W Constant Voltage Series



Features

- Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP
- Power Factor: > 0.95
- Efficiency: ≥91%
- 5 years warranty

Applications

- Magnetic Lamp

■ Approve




◆ Description

LS-150-48 LX EXC is a 150W constant voltage LED driver that operates from 198-264Vac input with 48V output voltage. With it's slim dimensions from 325*22.8*46.1mm. it is easy to integrate in Magnetic Lamp. To ensure trouble-free operation, protection is provided against output short circuit, over Load

◆ Model code

LS-150-48 LX EXC

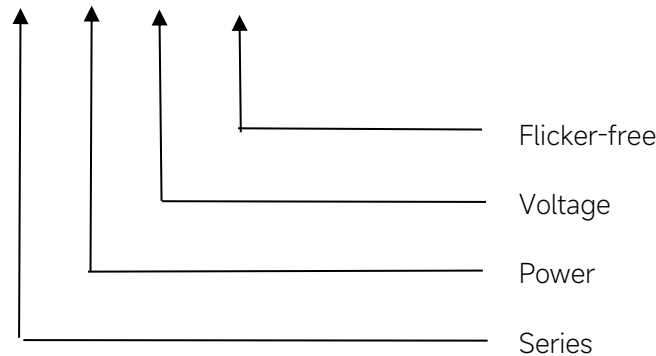

◆ Specification

Output	Constant Voltage	48VDC
	Current Range	0-3.13A
	Voltage Accuracy	±5%
	Output HF current ripple(≥1KHz)	±4%
	Output LF current ripple(≤120Hz)	±4%
	SVM	≤0.4
	P _{st}	≤1
	Efficiency(Typ.)	≥91%
Input	Rated input voltage	220-240VAC
	Range of input voltage	198-264VAC
	Frequency(Hz)	50/60 Hz
	Displacement factor	≥0.9
	Power Factor	>0.95
	Input Current max	0.95 A MAX
	Start-up time	< 0.5 S
	No Load Power	≤0.5W
	THD (Typ.)	< 10%
Protection	Over Load Protection	105-150% rated output power YES/Auto Resume
	Short circuit Protection	YES/Auto Resume
	Over Temperature Protection	YES/Auto Resume
Environment	Operating Temperature	-20°C...+45°C
	Humidity	20%-90%RH
	Tc	70°C
	Storage Temperature	-40°C...+80°C
	Life time	≥50,000h@Tc=70°C, full load
Surface	Dimension	325*22.8*46.1mm
Standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547	
Others	ErP	EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	<p>1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature.</p> <p>2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.</p> <p>3.The power supply of the guide rail should be used together with the guide rail.</p>	

◆ Model list

Number	Model number	Input			Output		
		Voltage (VAC)	Max.Current (A)	Frequency (Hz)	Normal working Voltage (V)	Normal working current (A)	Power (W)
1	LS-150-48 LX EXC	220-240	0.95	50/60	48	0-3.12	150


Note:

Test condition: 230Vac/50Hz, at full Load;

◆ Circuit Breaker


I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
45.6A	308μs	5pcs	9pcs	11pcs	9pcs	15pcs	18pcs

◆ 2D diagram

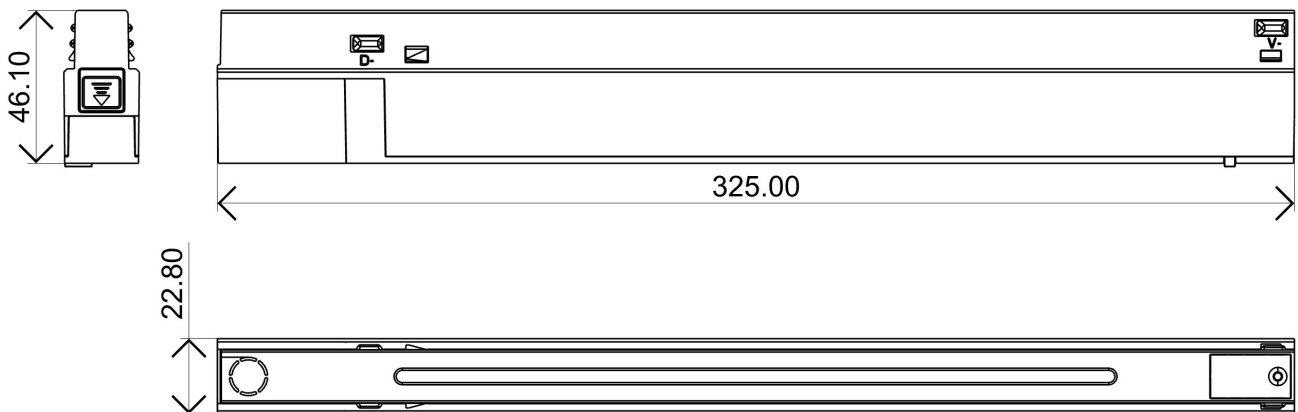


◆ Curve for LS-150-48 LX EXC


Lifetime vs. Temperature Curve

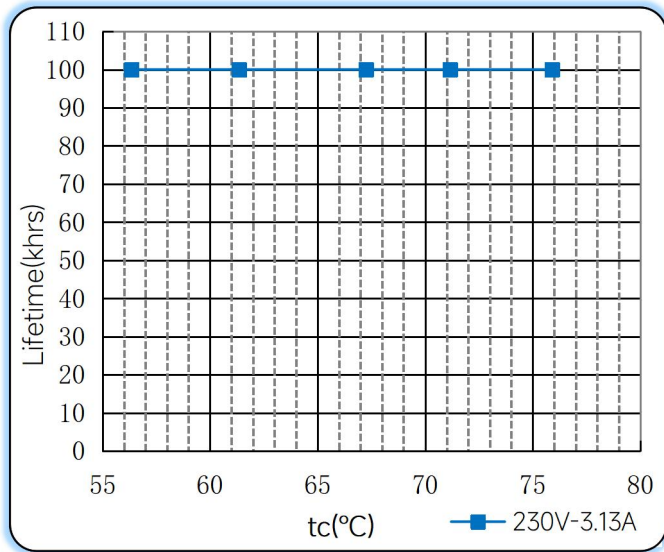


Efficiency vs. Load

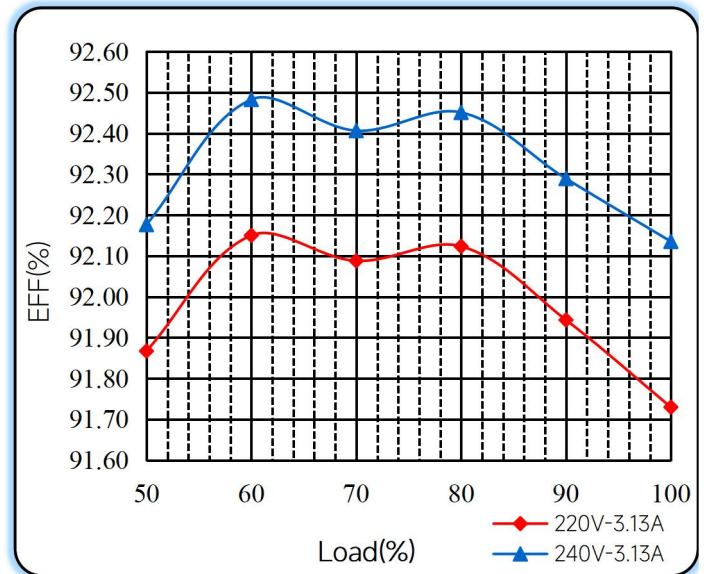


Power Factor Characteristics

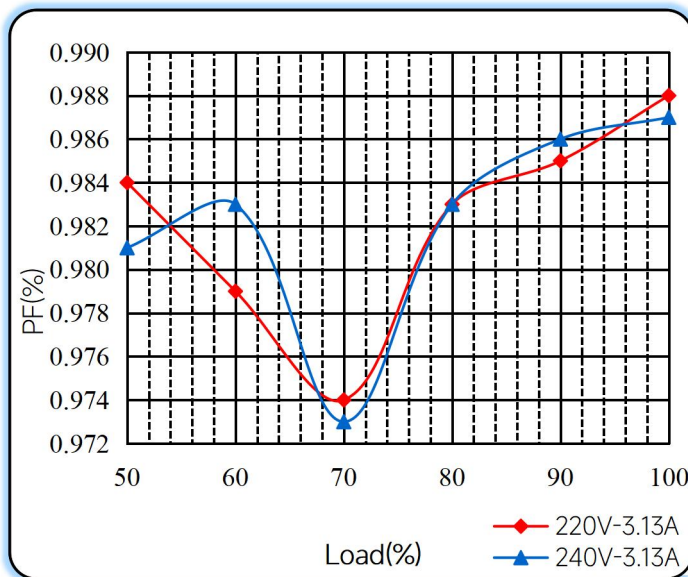

THD vs. Load

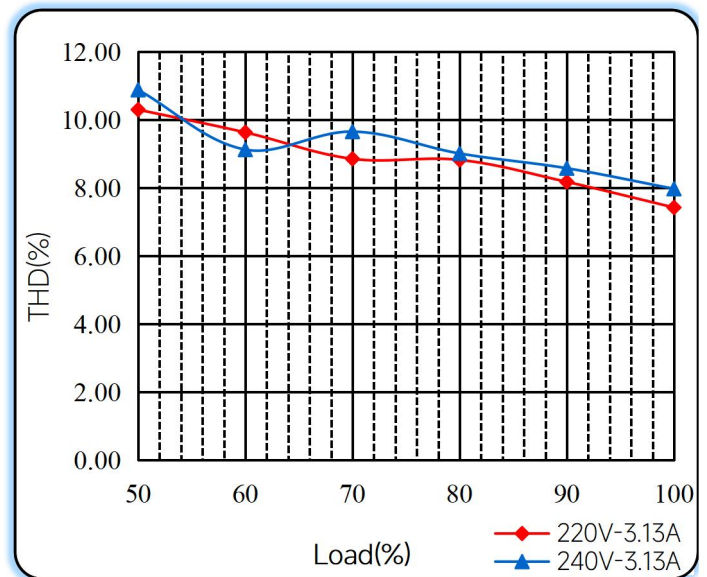

◆ Operating window

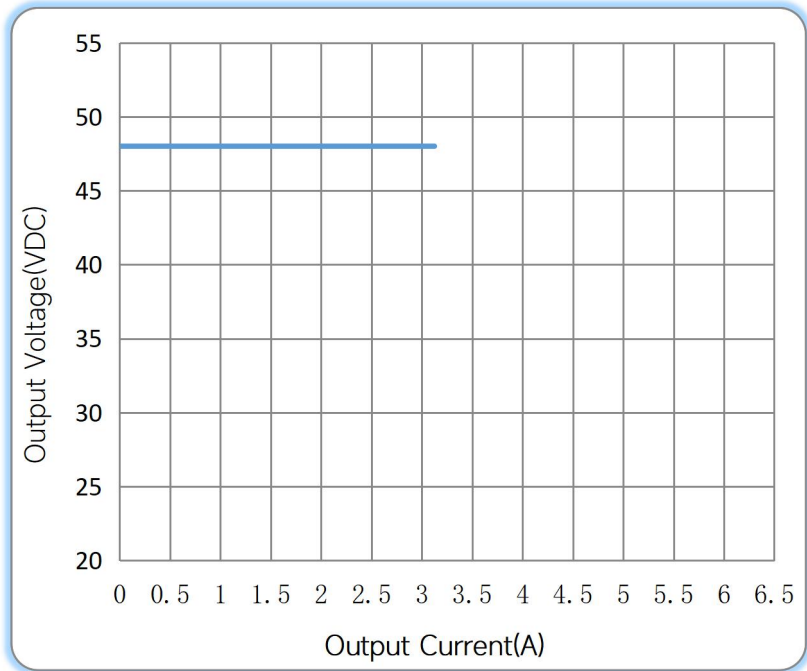

— Operating window 100%

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2023/03/07

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual