

100W constant Voltage-LS Series



■ Approve

CE CB  CCC SELV

EL




◆ Description

US-100-XX LI EXC is a 100W constant voltage LED driver that operates from 198-264Vac input with 12V or 24V output voltage. With it's compact dimensions from 353 X 30 X18mm. It is easy to integrate in LED strips products. To ensure trouble-free operation, protection is provided against output short circuit, over load and over temperature.

◆ Model code

US-100-XX LI EXC

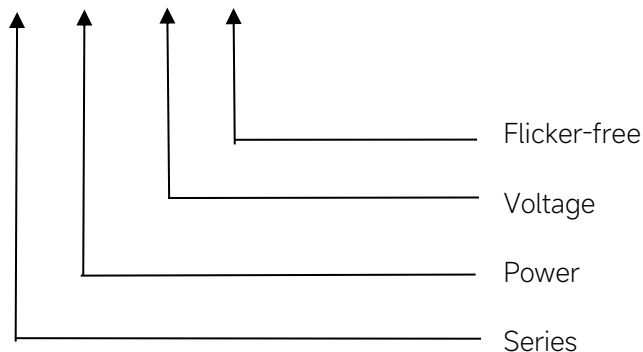

Features

- For luminaries of protection Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OTP
- Power Factor: ≥ 0.95 (Typ.)
- Efficiency: $\geq 90\%$ (Typ.)
- 5 years warranty

Applications

- LED strips


◆ Specification

Output	Constant Voltage	12VDC	24VDC	48VDC
	Current Range	0-8.33A	0-4.17A	0-2.08A
	Voltage Accuracy	±5%		
	Output HF current ripple(≥1KHz)	±5%		
	Output LF current ripple(≤120Hz)	±5%		
	SVM	≤0.4		
	Pst	≤1		
	Efficiency(Typ.)	≥90%@12V,Full load,230V;≥91%@24V/48V,Full load,230V		
Input	Rated input voltage	220-240V		
	Range of input voltage	198-264VAC		
	Maximum voltage	300VAC@1 h maximum,unit might not operate in this abnormal condition		
	Range of input voltage(VDC)	176-280VDC		
	Frequency(Hz)	0/50/60 Hz		
	Displacement factor	≥0.9		
	Power Factor	≥0.95@Full load,230V		
	Input Current max	0.6A		
	Start-up time	< 0.5S		
	No Load Power	≤0.5W		
	THD (Typ.)	< 10%@Full load,230V		
Protection	Over Load Protection	105-150%		
		YES/Auto Resume		
	Short Circuit Protection	YES/Auto Resume		
capability	Over Temperature Protection	YES/Auto Resume		
capability	Surge capability (L-N)	1KV		
	Surge capability (L/N-Ground)	NA		
Environment	Operating Temperature	-20°C~+45°C		
	Humidity	20%-90%RH		
	Tc	90°C		
	Storage Temperature	-20°C~+60°C		
	Life time	> 50000h@Tc=85°C		
	Ripple & Noise	≤20dB(A)@10cm		
Surface	Dimension	353X30X18(LXWXH)mm		
	material	PC		
Standards	Safety	GB19510. 1, GB19510. 14;IEC61347- 1, IEC61347-2- 13;EN61347- 1, EN61347-2- 13;EN62384;		
	EMC	GB/T17743, GB17625. 1;EN55015, EN61000-3-2, EN61000-3-3, EN61547;EN61000-4-5;EN61000-4-2,3,4,5,6,8,11, EN61547		

	Energy Efficiency	Erp2.0 EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters NOT specially mentioned are measured at 240VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Switch and dimmer are not recommended to connect between this product output and luminaries. 4.The efficiency testing will be affected by the instrument used and the results may also be different. 5.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered. 6.EL compatible with IEC 61347-2-13 Annex J, compatible with EN 60598-2-22 emergency lighting fixtures, compatible with EN 50172 central battery system applications. 7.All Eaglerise power supply are complied with EMI regulations. Since they are belong to component and will be installed inside system enclosure. When they are integrated into a system, the EMI characteristics of the system must be re-verified again.	

◆ Inrush Current


I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
39.4A	264μs	7pcs	12pcs	15pcs	12pcs	20pcs	25pcs

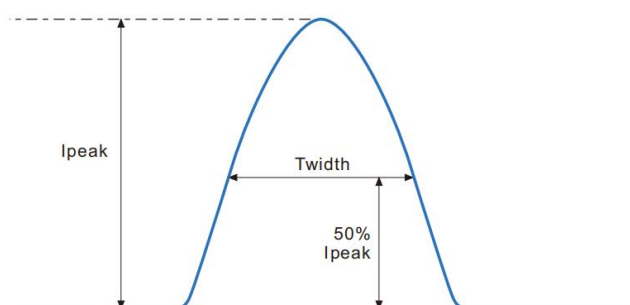


Remarks:

- 1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- 2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.

◆ Wiring diagram

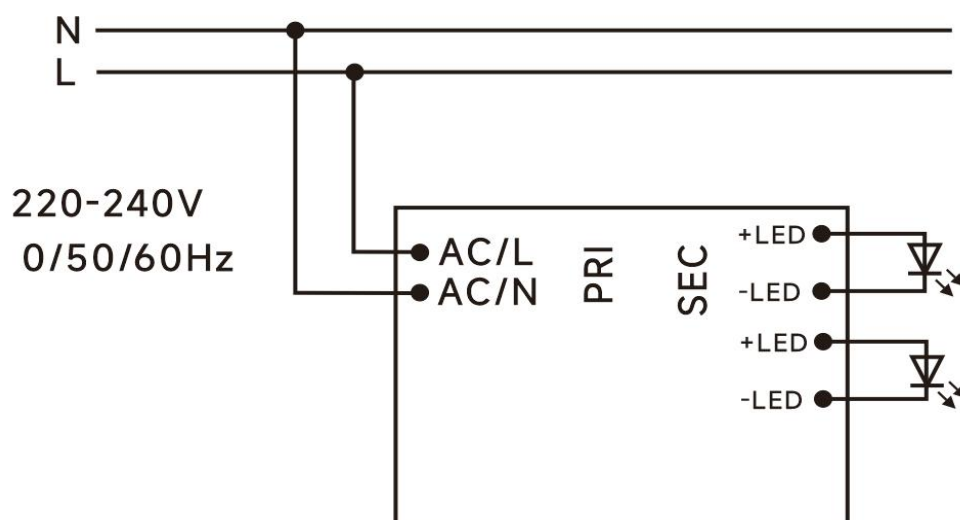

◆ 2D diagram

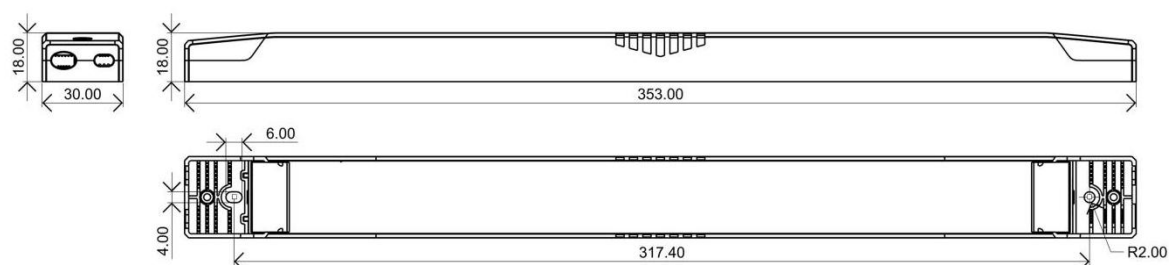

◆ Wiring & Connections

Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ²
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Recommended wire

Wire cross-section	Wire type
2*0.5mm ²	H03VVH2-F 2core
2*0.75mm ²	H03VVH2-F 2core
1.5mm ²	CCC 08(RV-90)
16AWG(1.25mm ²)	UL1015


Note: Solid wire is risky to use on an angled terminal. Stranded wire is recommended for this kind of use.

◆ Packaging


Model	Product Dimensions(mm)	weight/piece	Outer carton dimension(mm)	Quantity/carton	Net weight/carton(Kg)	Gross weight/carton(Kg)
US-100-XX LI EXC	353X30X18mm	0.26	370X275X215	81	21.35	21.97

◆ Curve for US-100-24 LI EXC


Lifetime vs. Temperature Curve

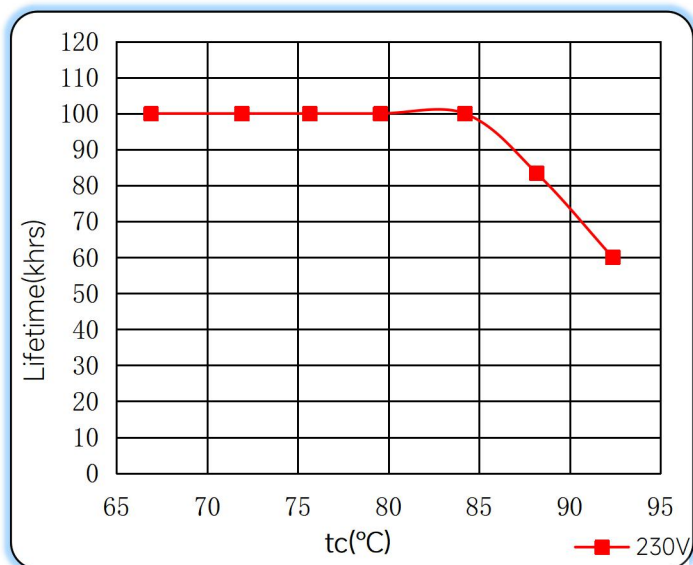


Efficiency vs. Load

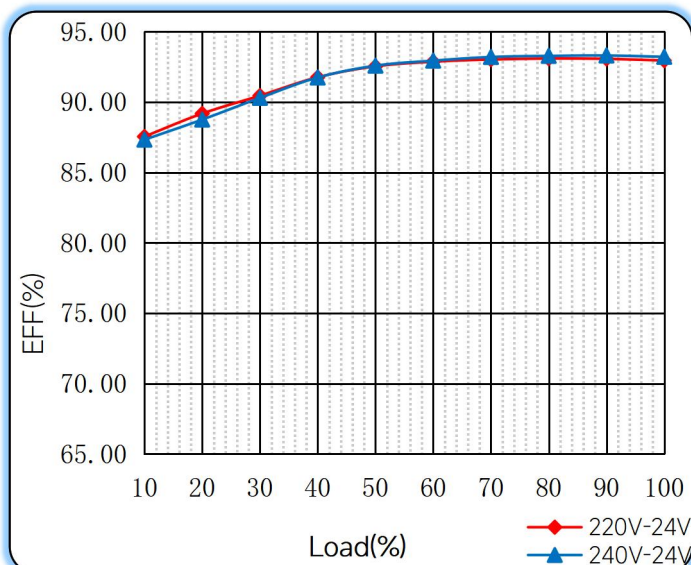


Power Factor Characteristics

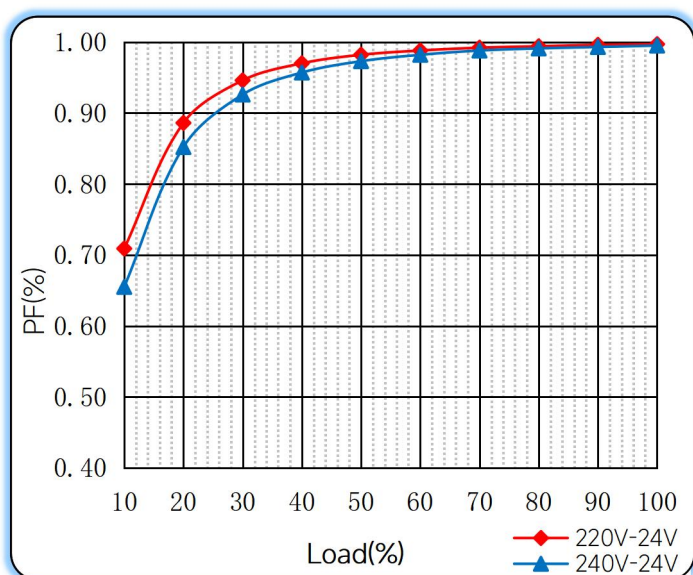

THD vs. Load

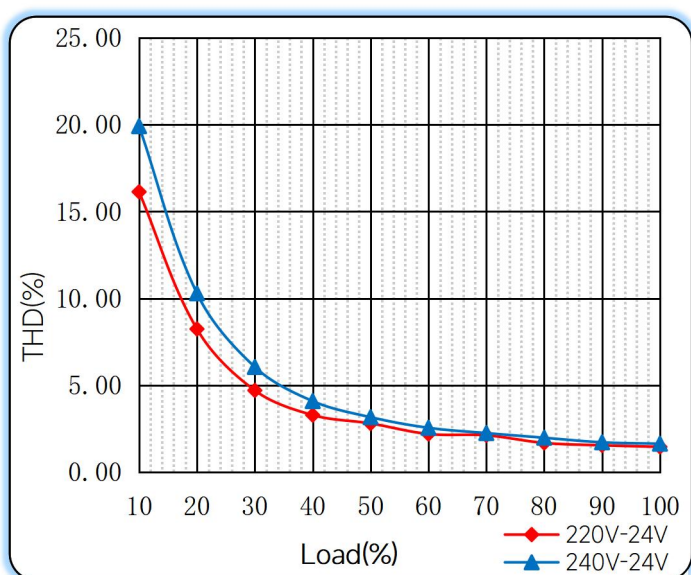

◆ Operating window

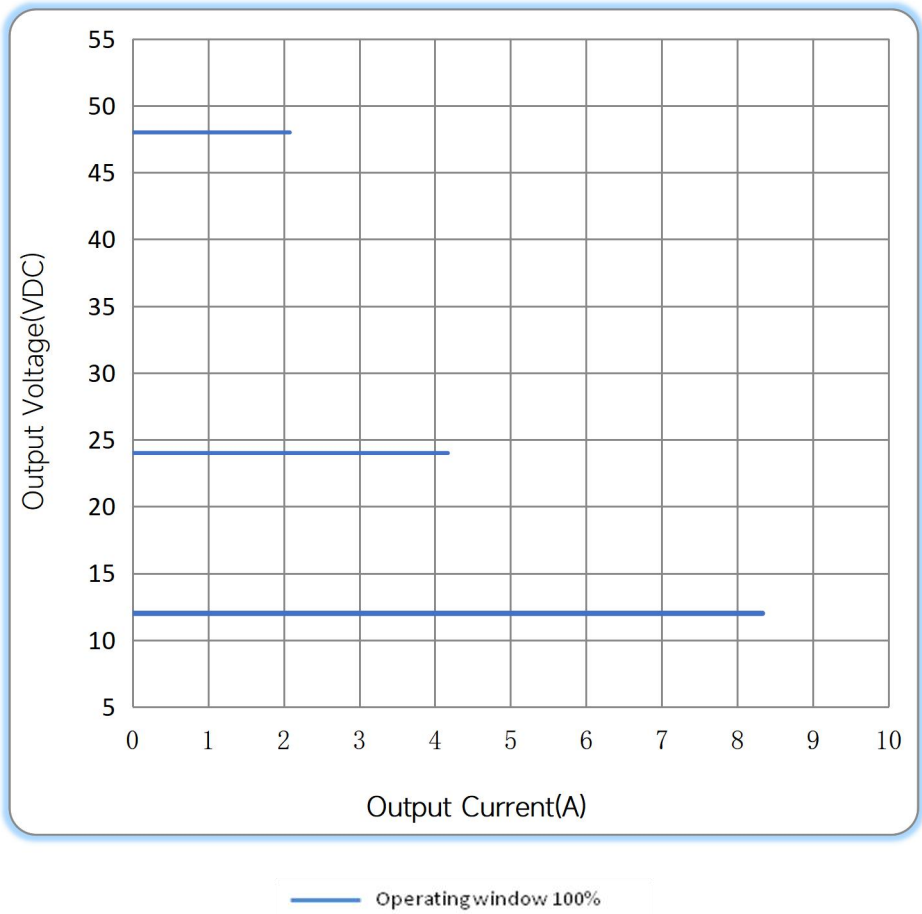

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2024/07/11

Remark:The final interpretation of the contents of the specification belongs to Eaglerise Electric & Electronic (China) Co., Ltd.

Tel: +86-0757-86256822, +86-0757-86256831
E-mail: sales@eaglerise.com
Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual