


150W DALI-2 DT8/2-channel DALI-2 DT6 + PUSH Dimming power supply



■ Approve

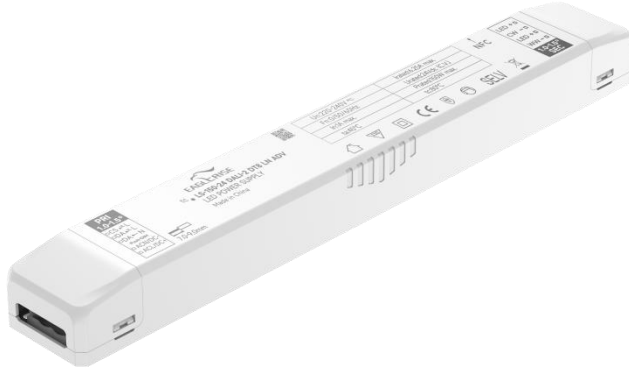

Features

- For luminaires of protection Class II, SELV, Independent
- Input Voltage: 220-240VAC
- Protections: SCP/OLP/OTP
- Power Factor: 0.95 (Typ.)
- Efficiency: $\geq 91\%$ (Typ.)
- 5 years warranty
- Support DT8 & DT6, Push Dimming
- DALI maintainace(Part 251,252,253,209)

Applications


- LED strips

◆ Description

LS-150-24 DALI-2 DT8 LN ADV is a 150W constant voltage LED driver that operates from 198-264Vac input with 24V output voltage. With its compact dimensions from 318 x 38 x 30 mm. It is easy to integrate in LED strips products. To ensure trouble-free operation, protection is provided against output short circuit, over load and over temperature. Support switching between DT8(single address) and DT6(dual address) via NFC software.

◆ Model code

LS-150-24 DALI-2 DT8 LN ADV

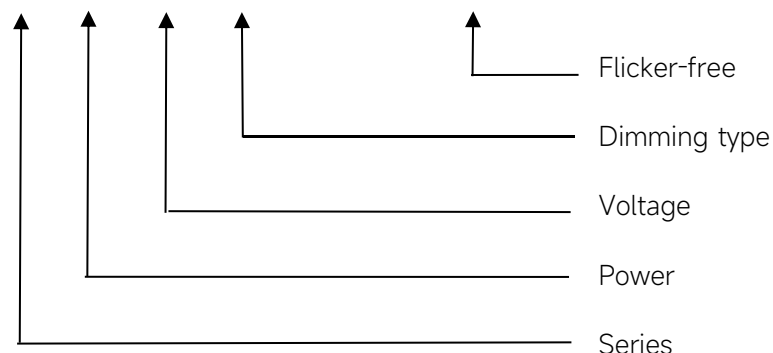


◆ Specification

Output	Constant Voltage	24VDC
	Current Range	0-6.25A
	Voltage Accuracy	±5%
	Output LF Voltage ripple(≤120Hz)	±1%
	SVM	≤0.4@Full Load,230V
	Pst	≤1@Full Load,230V
	Efficiency(Typ.)	≥91%@Full load,230V
	EOFI	15%
Input	Rated input voltage	220-240V
	Range of input voltage	198-264VAC
	Maximum voltage	300VAC@1 h maximum,unit might not operate in this abnormal condition
	Range input voltage(VDC)	176-280VDC
	Frequency(Hz)	0/50/60 Hz
	Displacement factor	≥0.9@Full Load,230V
	Power Factor	0.95@Full Load,230V
	Input Current max	1A Max
	Start-up time(AC mode)	< 0.8S
	Start-up time(DC mode)	< 0.8S
	Switch over time(AC/DC mode)	< 0.4S
	Standby Power	≤0.5W, @DIM TO OFF
	THD (Typ.)	< 10%@220-240VAC, Full load
Dimming	Dimming	YES
	Dimming mode	DALI-2 (IEC 62386-101,102,207,209,251,252,253) &Push Dimming (Corridor Function)
	Dimming depth	1%
	Dimming current range	1%-100%
Protection	Over Load Protection	105-150% rated output power
		YES/Auto Resume
	Over Voltage Protection	> 25.2VDC
		YES/Auto Resume
Capability	Short Circuit Protection	YES/Auto Resume
	Over Temperature Protection	YES/Auto Resume
	Surge capability (L-N)	1KV
Withstand voltage	Surge capability (L/N-Ground)	NA
	Input-Output	3750V/5mA/60S
	Input-DALI	1500V/5mA/60S
Environment	Output-DALI	1500V/5mA/60S
	Operating Temperature	-20°C~+45°C

	Humidity	20%-90%RH
	Tc	80°C
	Storage Temperature	-30°C~+80°C
	Life time	> 50000h@Tc=80°C,full load
	Noise	≤25dB(A)@20cm
Surface	Dimension	318X38X30(LXWXH)mm
	material	PC
Standards	Safety	IEC61347- 1, IEC61347-2- 13;EN61347- 1, EN61347-2- 13;EN61347- 1, EN61347-2- 13, EN62384;GB19510. 1, GB19510. 14;S/NZS 61347- 1, AS/NZS 61347-2- 13
	EMC	EN55015, EN61000-3-2, EN61000-3-3, EN61547;GB/T17743;GB17625. 1;EN 62493
	Erp	Erp2.0 EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
DALI performance	EN 62386-101 (DALI-2) EN 62386-102 (DALI-2) EN 62386-207 (DALI-2,including part251,252,253) EN 62386-209(DT8)	
Note	1.All parameters NOT specially mentioned are measured at 240VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3.Switch and dimmer are not recommended to connect between this product output and luminaries. 4.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered.	

◆ Inrush Current


I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
46.6A	360μs	4pcs	7pcs	9pcs	7pcs	12pcs	15pcs

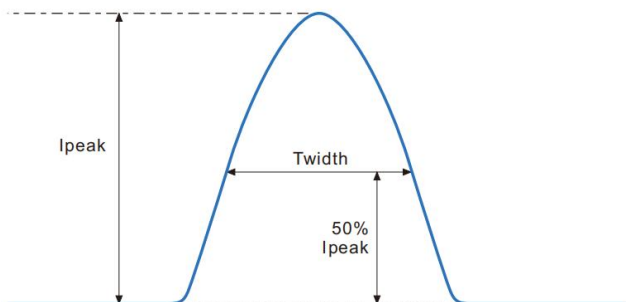


Remarks:

- 1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- 2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.

◆ Wiring diagram

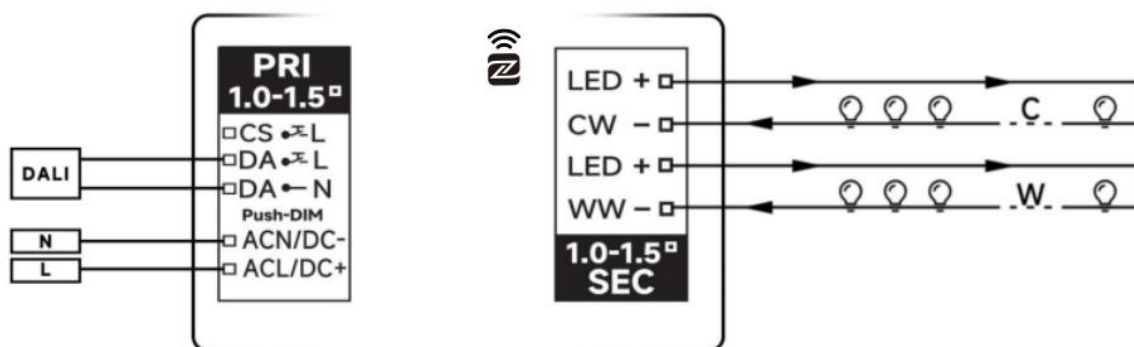


DALI Connection

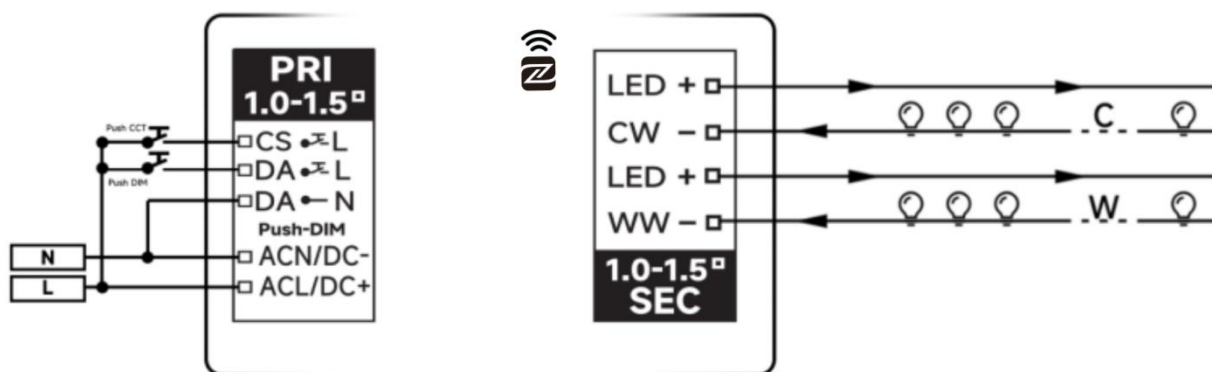


push DIM/CCT Connection

◆ 2D diagram

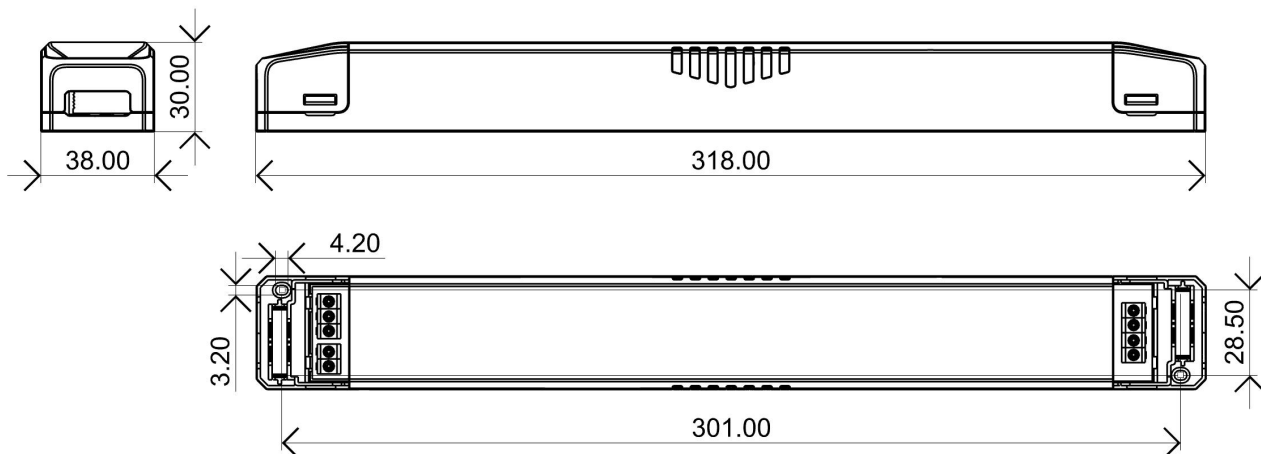

Terminal

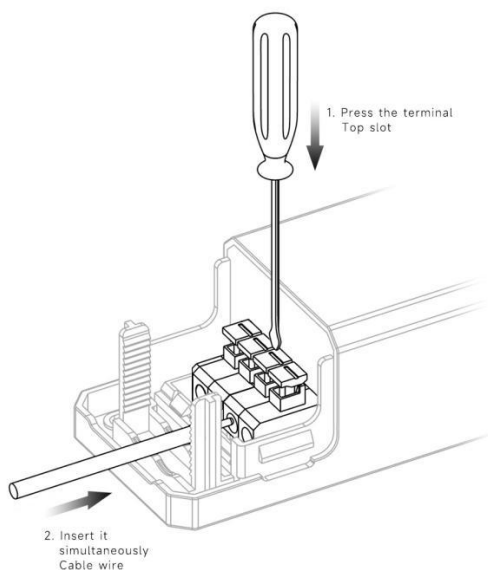

◆ Wiring & Connections

Specification item		Value (Unit)
Input	Input wire cross-section	1.0...1.5 mm ²
	Input wire gauge.	16...18 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	1.0...1.5 mm ²
	Output wire gauge.	16...18 AWG
	Output wire strip length	7...9mm

◆ Recommended wire


Wire cross-section	Wire type
2*0.5mm ²	H03VVH2-F 2core
2*0.75mm ²	H03VVH2-F 2core
1.5mm ²	CCC 08(RV-90)
16AWG(1.25mm ²)	UL1015

Note: Solid wire is risky to use on an angled terminal. Stranded wire is recommended for this kind of use.

◆ Packaging


Model	Product Dimensions(mm)	weight/piece	Outer carton dimension(mm)	Quantity/carton	Net weight/carton(Kg)	Gross weight/carton(Kg)
LS-150-24 DALI-2 DT8 LN ADV	318X38X30mm	0.43	325x235x165mm	18	7.74Kg	8.45Kg

◆ Dimming curve

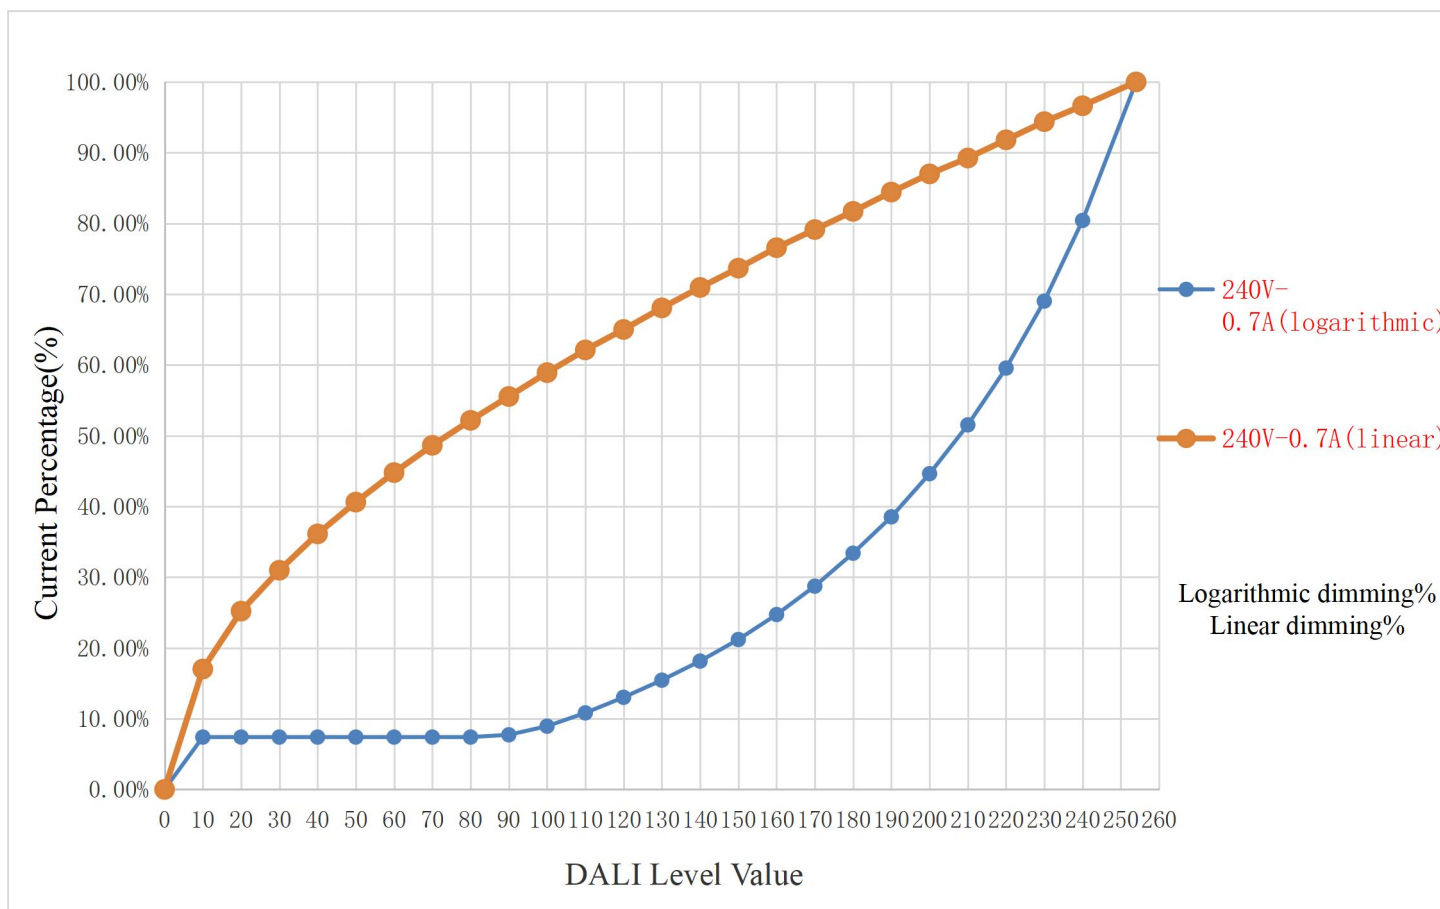


◆ Curve for LS-150-24 DALI-2 DT8 LN ADV


Lifetime vs. Temperature Curve

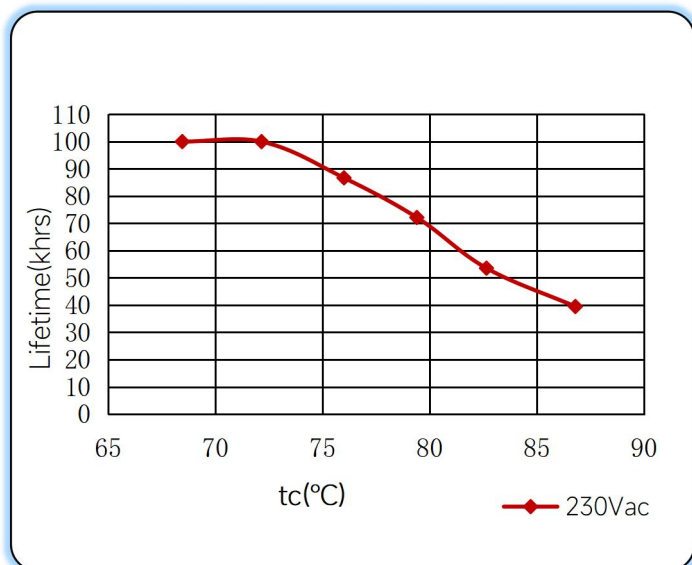


Efficiency vs. Load

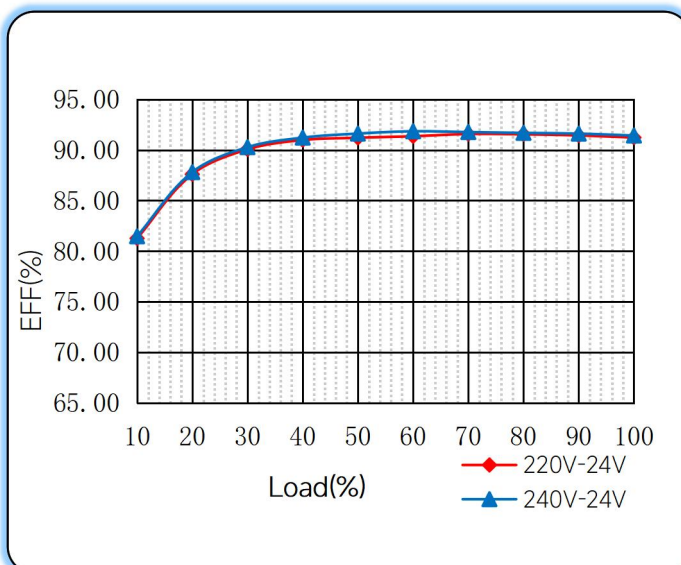

Power Factor Characteristics

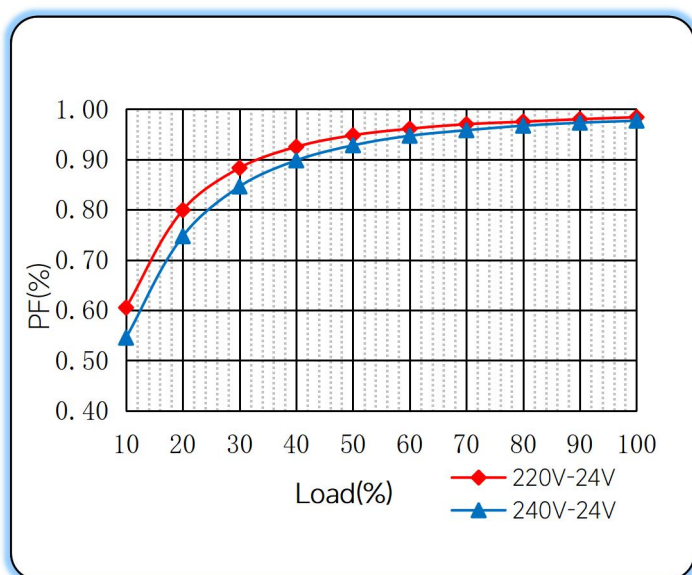

THD vs. Load

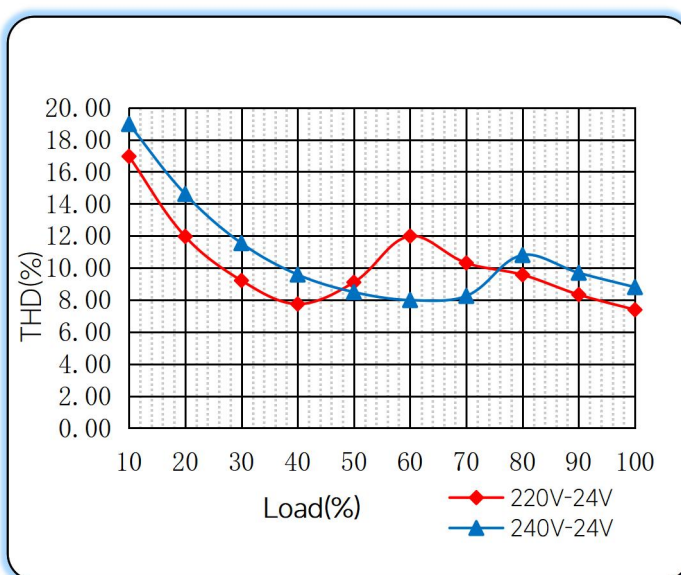


◆ Push dimming operation

Action	Action duration	Function
Short push	<0.5s	Turn on/off
Short push twice	<0.5s	LED on: Save current brightness level LED off: Delete saved level and turn on at 100% brightness
Short push five times	<3s	Quit Corridor mode
Long push	0.5-14s	Dimming up or down
Long push	15s-2mins	Sync all LEDs to be 100% brightness
Long push	>2mins	Enter Corridor mode - LED keep 100% brightness for 2mins. Then brightness will turn to be 10% within 32s if no action during 2mins 100% brightness.

Note:


- 1.The factory default brightness is at 100%.
- 2.Up to 30 drivers can perform the PUSH dimming at the same time when utilizing one common push button
- 3.The maximum length of the cable from the push button to the last driver is 200 meters.

◆ Corridor mode

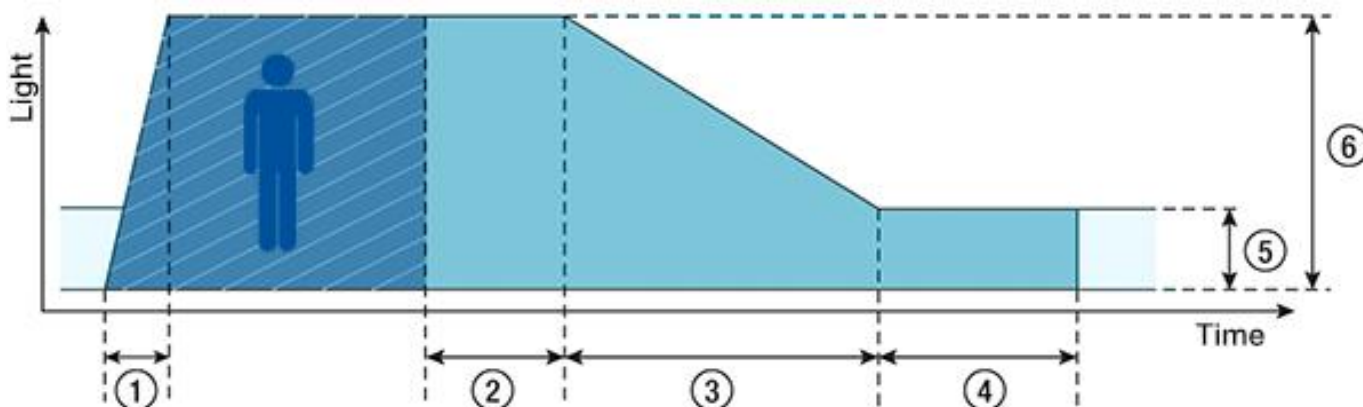

- ◆ ① **Fade-in time(0.5s)**: the time that starts as soon as the presence of a person is detected. During the fade-in time the luminous intensity is faded up to the presence value.
- ◆ ② **Run-on time(120s)**: the time that starts as soon as the presence of a person is no longer detected. If the presence of a person is detected again during the run-on time the run-on time is restarted from zero. If no presence is detected during the run-on time the fade time is started as soon as the run-on time expires.
- ◆ ③ **Fade time(32s)**: the time during which the luminous intensity is faded from the presence value to the absence value.
- ◆ ④ **Switch-off delay (level=10%.Non-configurable)**: the time during which the absence value is held before the lighting is switched off. Depending on the profile selected the switch-off delay may have different values or may not be defined.
- ◆ ⑤ **Absence value(default: 10 %)**: the luminous intensity when there is no person present.
- ◆ ⑥ **Presence value (default: 100 %)**: the luminous intensity when persons are present.

◆ Operating window

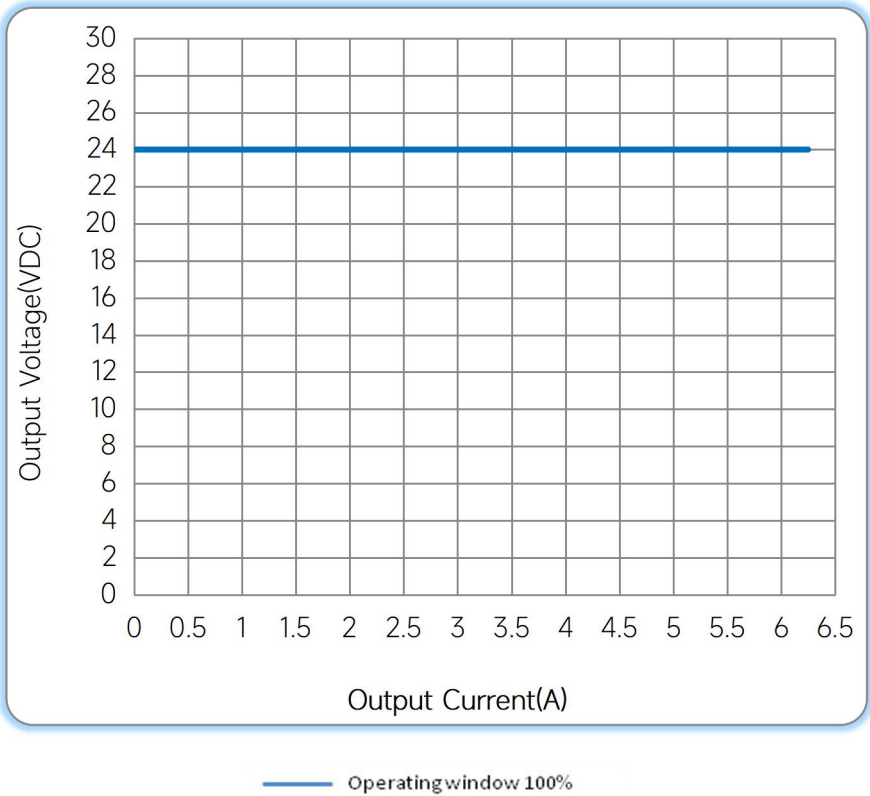

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2026/01/12

Remark:The final interpretation of the contents of the specification belongs to Eaglerise Electric & Electronic (China) Co., Ltd.

Tel: +86-0757-86256822, +86-0757-86256831
E-mail: sales@eaglerise.com
Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual