


## 60W DALI+PUSH Dimming power supply

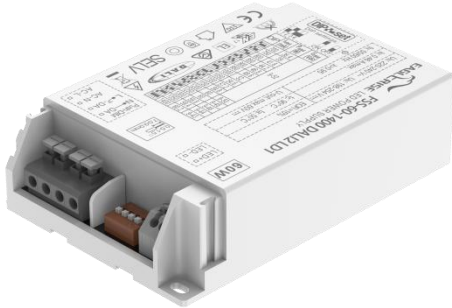

### Features

- Class II, SELV, built\_in
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor > 0.95
- Efficiency ≥88%
- Support DALI-2, Push Dimming
- 5 years warranty

### Applications


- LED panel,down light,spot light

### ◆ Description

FSS-60-1400 DALI-2 LD1 is a 60W constant current LED driver with 700 to 1400mA output current and a forward voltage range from 9 to 52Vdc. The output current is adjustable by DIP Switch. With it's dimensions from 110 x 74 x 30 mm it is easy to integrate in LED Panel, spot and down light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

### ◆ Model code

#### FSS-60-1400 DALI-2 LD1

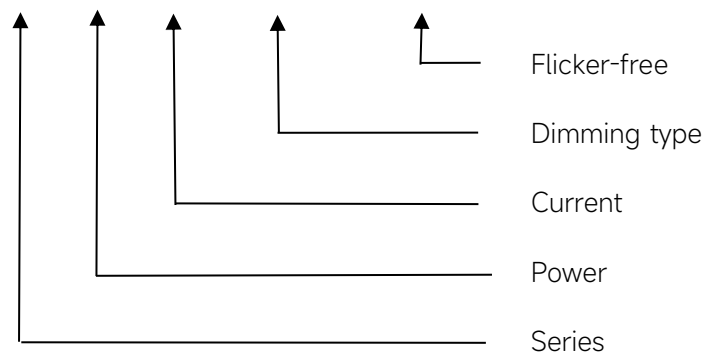

## ◆ Specification

	Constant Current (mA)	700	750	800	.....	1150	1200	1250	1300	1350	1400	
Output	Voltage Range (VDC)	9-52				9-50		9-48	9-46	9-44	9-43	
	Unload voltage Max.	60VDC										
	Current Accuracy	±5%										
	Output HF current ripple(≥1KHz)	±10%										
	Output LF current ripple(≤120Hz)	±3%										
	SVM	≤0.4										
	P <sub>st</sub>	≤1										
	Efficiency(Typ.)	88%										
	Input	Rated input voltage	220-240VAC									
Range of input voltage		198-264VAC										
Rated input voltage(DC)		198-280VDC										
Frequency(Hz)		0/50/60 Hz										
Displacement factor		≥0.9										
Power Factor		>0.95										
Input Current		0.46A										
Start-up time		< 0.5S										
No Load Power		≤0.5W										
Standby Power		≤0.5W										
Network standby power		≤0.5W										
THD (Typ.)		<10%										
Dimming	Dimming	YES										
	Dimming mode	DALI-2 (IEC 62386-101,102,207) & Push										
	Dimming depth	1%										
	Dimming current range	1 ~100%										
Protection	Over Load Protection	103-120%										
		YES/Latch off										
	Over Voltage Protection	> 60VDC										
		YES/Latch off										
Environment	Short circuit Protection	YES/Latch off										
	Over Temperature Protection	YES/Auto Resume										
	Operating Temperature	-20°C~+50°C										
	Humidity	20%-90%RH										
	Tc	90°C										
Surface	Storage Temperature	-40°C~+80°C										
	Lifetime	>50000h,@Tc=85°C										
Surface	Dimension	110X74X30mm (With side caps : 160X74X30mm)										


standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;		
Others	ErP	EU 2019/2020	
	RoHS	RoHS (2011/65/EU) (EU)2015/863	
Note	<p>1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature.</p> <p>2.Ripple &amp; Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF &amp; 47 uF parallel capacitor.</p> <p>3.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered.</p>		

## ◆ Parameter


Number	Output	Switch position			
	Current(mA)	1	2	3	4
1	700	ON	--	--	--
2	750	--	ON	--	--
3	800	ON	ON	--	--
4	850	--	--	ON	--
5	900	ON	--	ON	--
6	950	--	ON	ON	--
7	1000	ON	ON	ON	--
8	1050	--	--	--	ON
9	1100	ON	--	--	ON
10	1150	--	ON	--	ON
11	1200	ON	ON	--	ON
12	1250	--	--	ON	ON
13	1300	ON	--	ON	ON
14	1350	--	ON	ON	ON
15*	1400	ON	ON	ON	ON

\* Factory default


◆ **Wiring diagram**

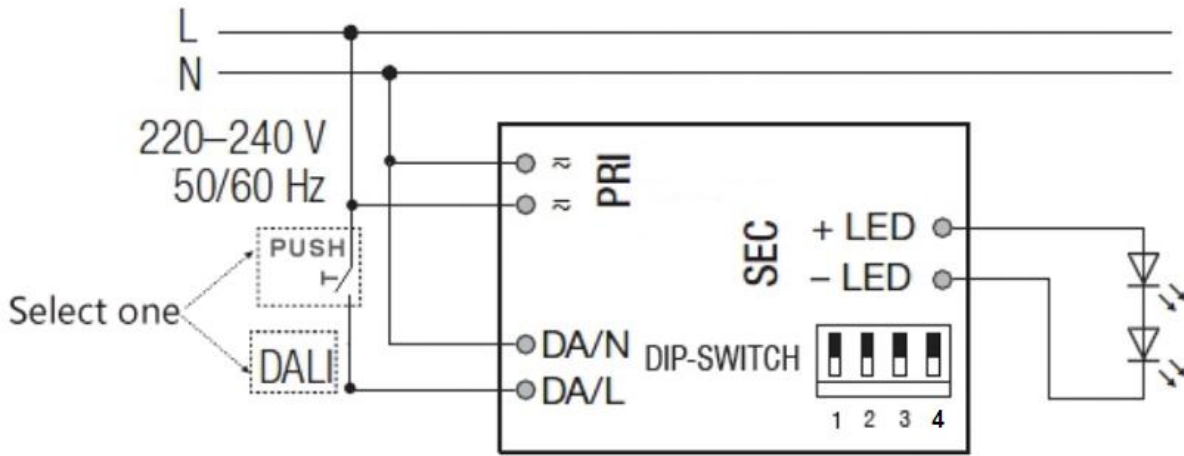

◆ **2D diagram**

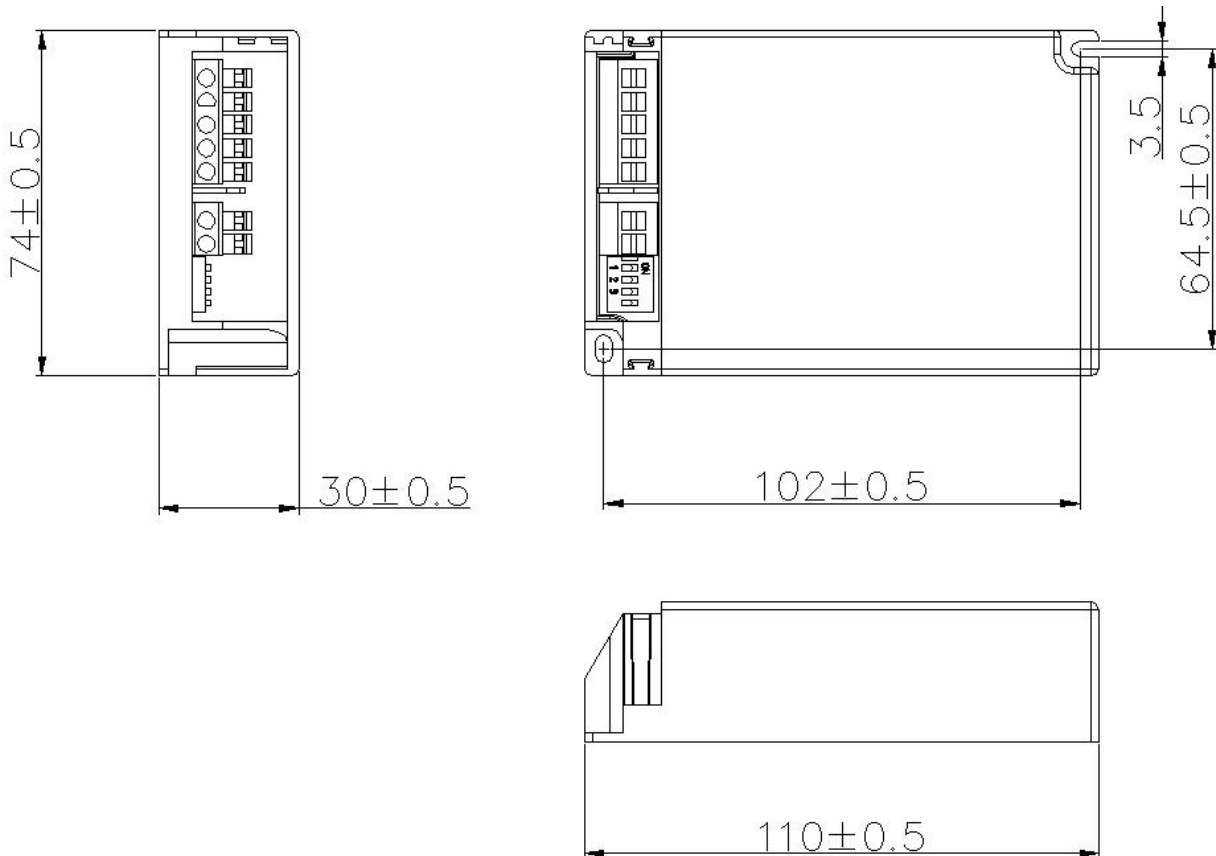

With side caps

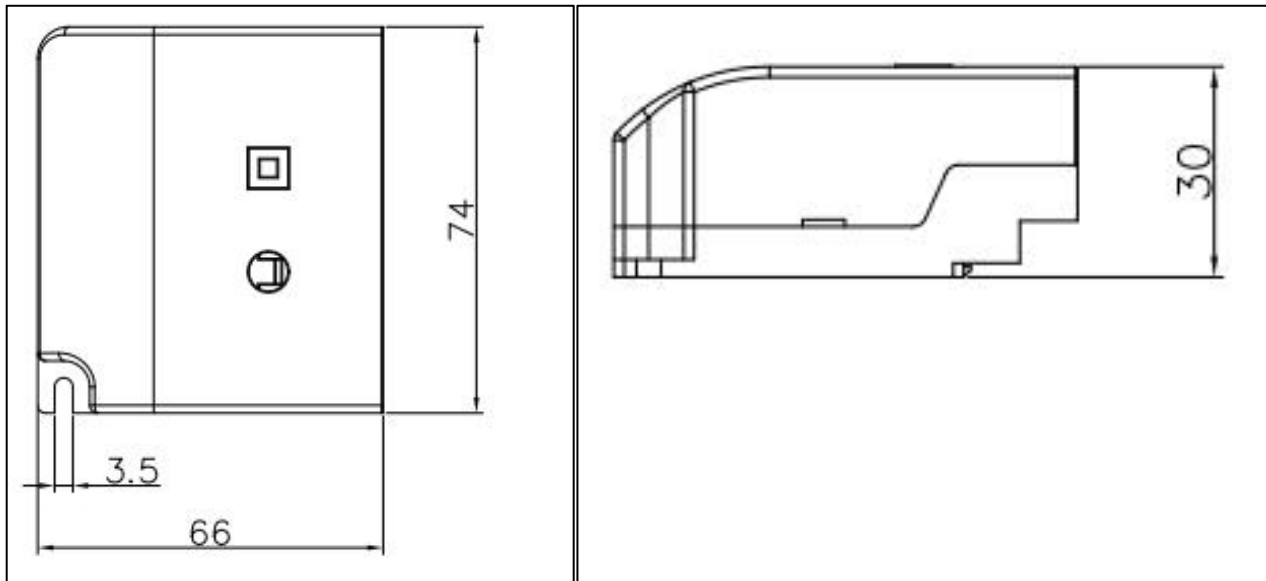


## ◆ Wiring & Connections


Specification item		Value (Unit )
Input	Input wire cross-section	0.5...1.5 mm <sup>2</sup>
	Input wire gauge.	16...20 AWG
	Input wire strip length	8...9mm
Output	Output wire cross-section	0.5...1.5 mm <sup>2</sup>
	Output wire gauge.	16...20 AWG
	Output wire strip length	8...9mm

## ◆ Curve for FSS-60-1400 DALI-2 LD1, $I_o=1400mA$


### Lifetime vs. Temperature Curve

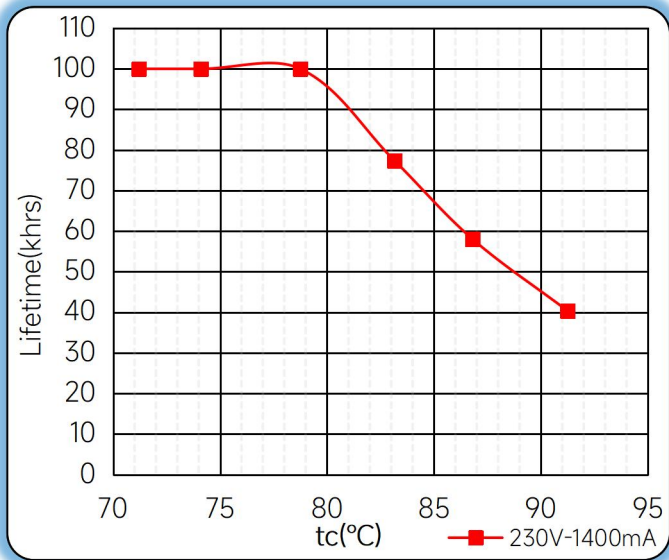


### Efficiency vs. Load

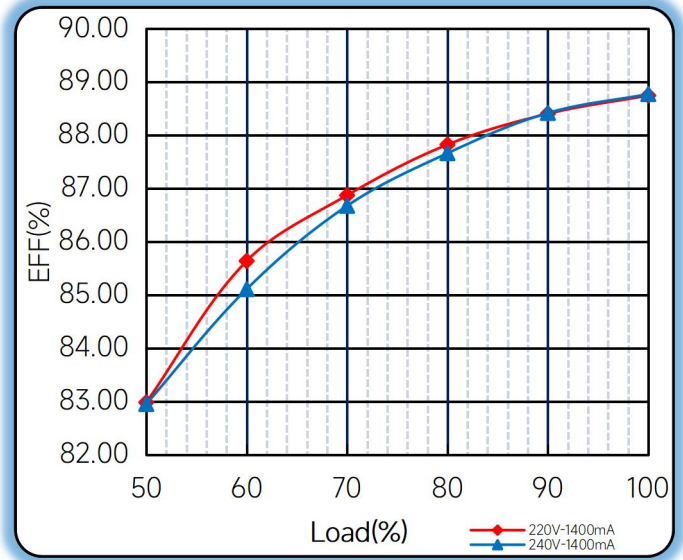


### Power Factor Characteristics

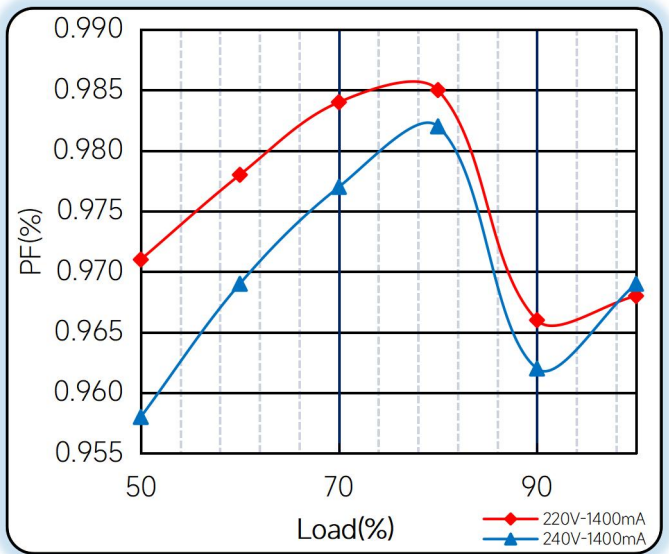

### THD vs. Load

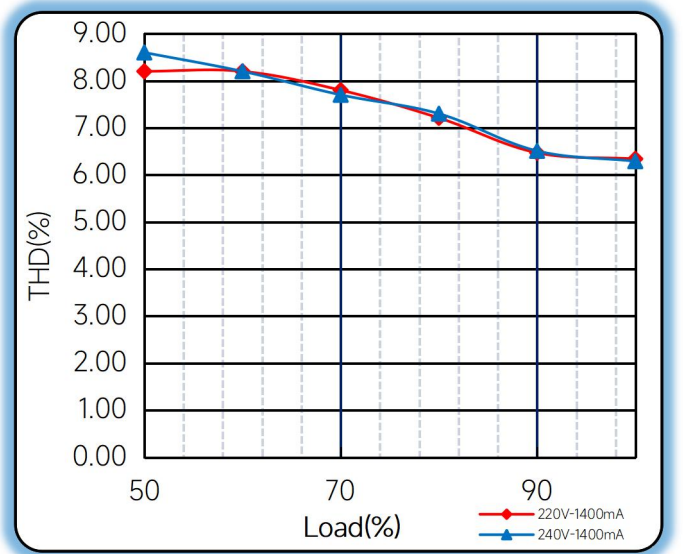

◆ **Operating window**

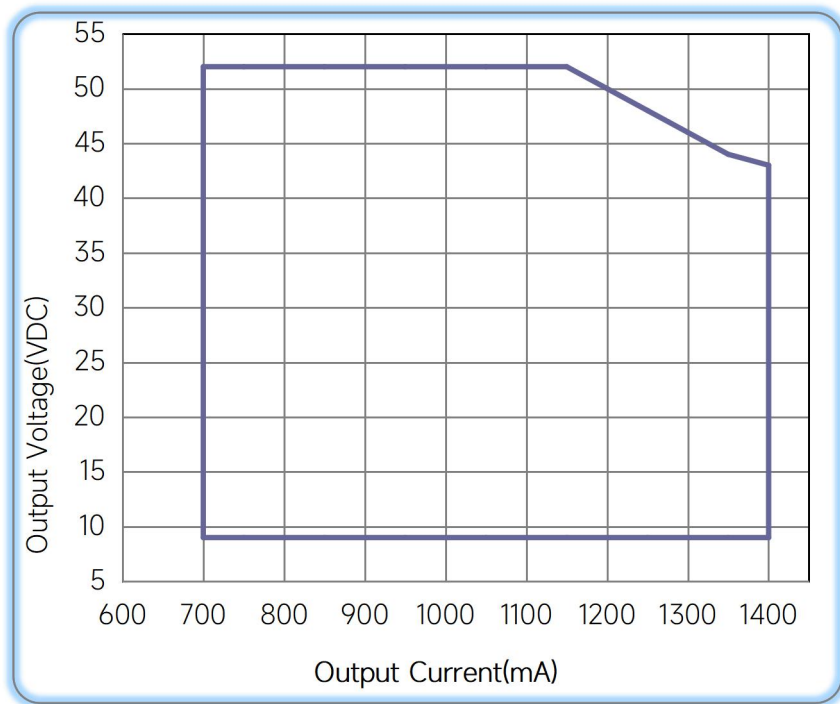

◆ **Revision Updates**

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			1.0.0	2021-8-2

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual