


24W Constant Voltage Driver



The VTS-24-XX IP67 L series is a 24W, constant-Voltage IP67 LED driver that operates from 198-264Vac input with excellent power factor and THD feature. This series of products is specially designed for direct power supply applications such as LED strips. The high efficiency of these drivers and compact plastic case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Model code

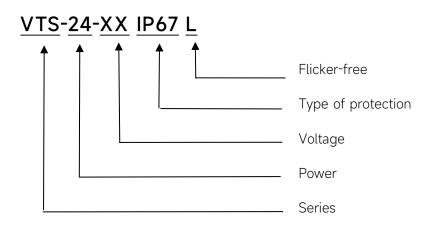



Specification

Output	Constant Voltage	12VDC	24VDC			
	Current Range	0-2A	0-1A			
	Voltage Accuracy	±5%				
	Output HF current ripple(≥1KHz)	±5%				
	Output LF current ripple(<120Hz)	±5%				
	SVM	≤0.4				
	P _{st}	ব				
	Efficiency(Typ.)	86%				
	Rated input voltage	220-240VAC				
	Range of input voltage	198-264VAC				
	Frequency(Hz)	47-63 Hz				
	Displacement factor	≥0.9				
Input	Power Factor	0.95@Full load,230V				
	Input Current max	0.16A				
	Start-up time	< 0.5S				
	No Load Power	≤0.5W				
	THD (Typ.)	<10%@Full load,230V				
	Over Land Protection	110-150%				
Ductostica	Over Load Protection	YES/Auto Resume				
Protection	Short circuit Protection	YES/Auto Resume				
	Over Temperature Protection	YES/Auto Resume				
	Operating Temperature	-20°C~+50°C				
	Humidity	20%-90%RH				
Environment	Тс	90°C				
	Storage Temperature	-20°C~+85°C				
	Life time	>50000h@Tc=90°C,230VAC				
Surface	Dimension	118X35X26(LXWXH)mm				
Standards	EN 61347-1; EN61347-2-13; EN62	384; EN55015; EN61000-3-2 ; EN6100	00-3-3; EN 61547			
Others	ErP	EU 2019/2020				
Others	RoHS	RoHS (2011/65/EU) (EU)2015/863				
Note	 1.All parameters NOT specially mentioned are measured at 230Vac input and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 µF parallel capacitor. 3.This LED driver meets the EMI specifications above, but EMI performance of a lighting fixture also depends on the other devices on the fixture. 4.When the withstand voltage test is performed, the gas discharge tube grounding/disconnecting device (nut and metal lock piece) 					
	located on the driver input should be temporarily removed to prevent the gas discharge tube inside the driver from functioning(refer to IEC60598-1-10.2). After the test is completed, the nut and metal lock piece must be reinstalled to restore the power line to the ground surge protection function and ensure reliable contact between the metal lock piece and the end cover.					



Model list

Model	Input Voltage	Output		Power Factor	Typical	
Model	Range	Voltage	Range		Fower Factor	Efficiency
VTS-24-12 IP67 L	198~264Vac	12V	0~2A	24W	0.95	86%
VTS-24-24 IP67 L	198~264Vac	24V	0~1A	24W	0.95	86%


Note:

Test condition: 230Vac/50Hz, at full Load;

Circuit Breaker


I ^{peak}	Twidth	B10	B16	B20	C10	C16	C20
20.8A	119.8µs	33pcs	54pcs	67pcs	50pcs	80pcs	100pcs

Wiring diagram

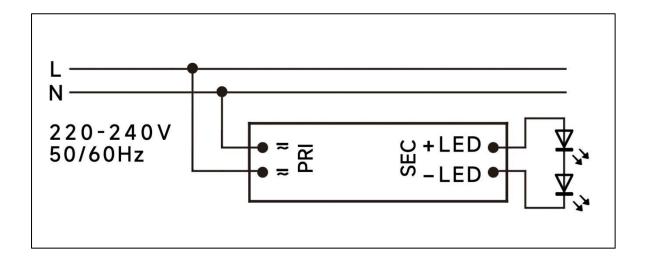




♦ 2D diagram

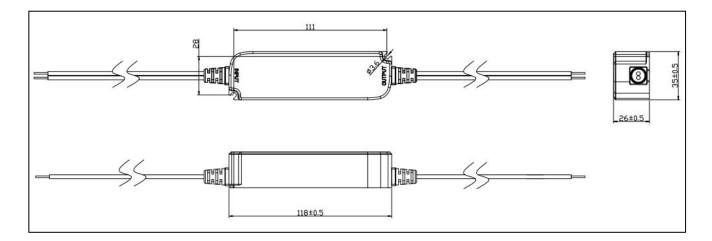

TYPE	Total Length	Outside Color	Inside Wires Color	Wire Model/Diameter
Input wire	0.36M	Black	Brown/Blue	H05RN-F/2x1.0mm ²
Output wire	0.36M	Black	Red/Black	H05RN-F/2x1.0mm ²

Note: Wire length of input and output can be changed as customer's requirement


Derating

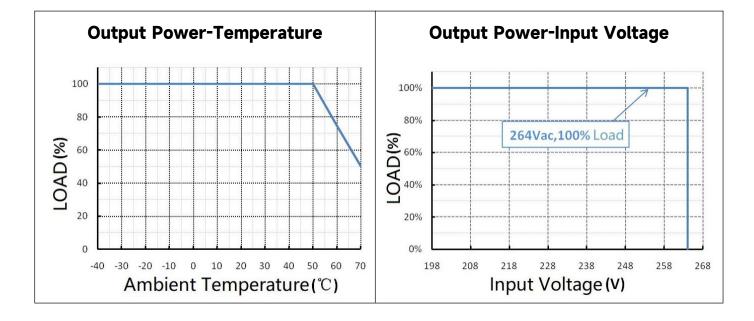




Curve for VTS-24-24 IP67 L


Lifetime vs. Temperature Curve

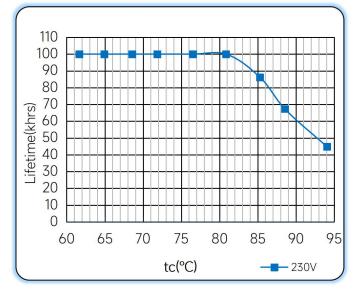


Power Factor Characteristics

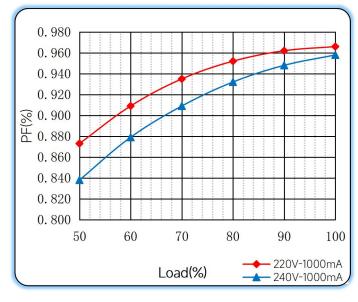

Efficiency vs. Load

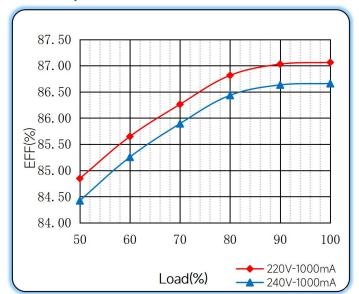


THD vs. Load

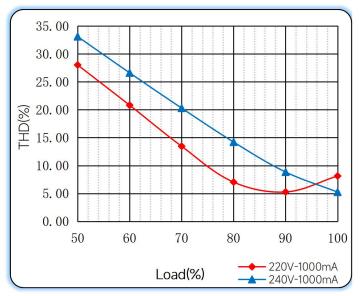



Operating window

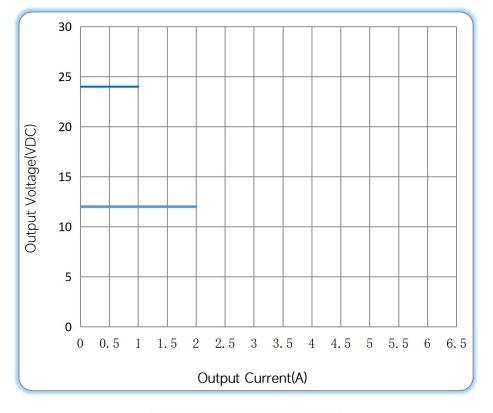

Operating window 100%

• Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			А	2022/05/15

Tel: +86-0757-86256822, +86-0757-86256831 E-mail: sales@eaglerise.com Website : <u>https://lighting.eaglerise.com</u>





EAGLERISE

Manual